

WAAS
CH **90417**
W11A

APP CRS
114°

Rwy Ldg
TDZE **539**
Apt Elev **544**

RNAV (GPS) RWY 11

ST LOUIS RGNL (ALN)

RNP APCH.


▼

▲

Rwy 11 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 2100 direct
QUNIE and hold.

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER* 126.0 (CTAF) 0 239.0	GND CON 120.2	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

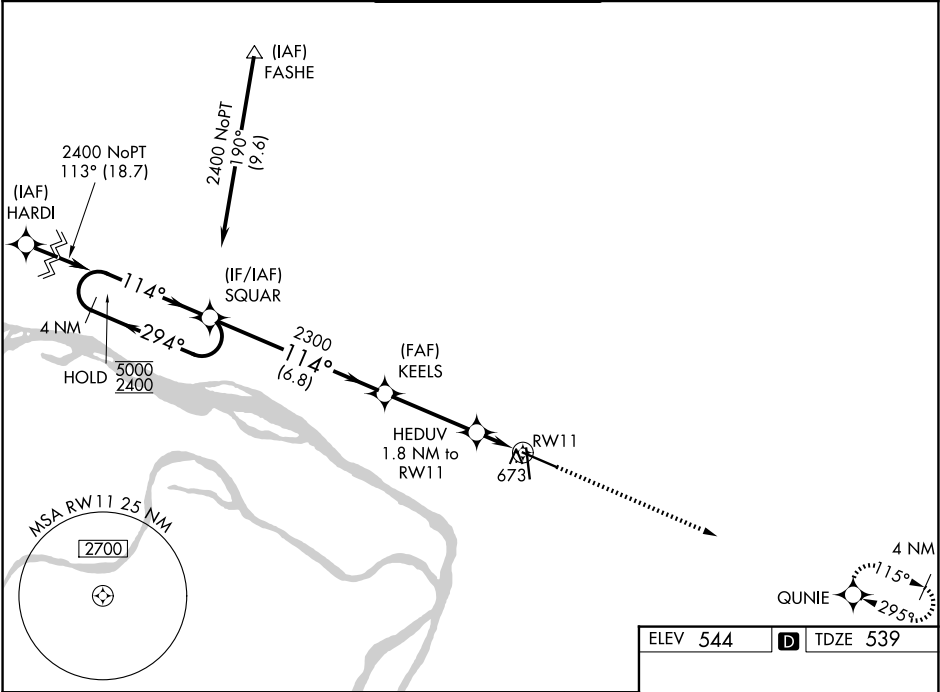

4 NM Holding Pattern

SQUAR

5000
2400

←294°
114°→

GP 3.00°
TCH 46

2300

114°

KEELS 2300

HEDUV 1.8 NM to RW11

*1.3 NM to RW11

RW11

*1140

6.8 NM

3.6 NM

0.5 NM

1.3

2100 QUNIE

*LNAV only.

114°

ZL

TWR

001 X 0059

35

8099 X 1.50

AS

29

CATEGORY	A	B	C	D
LPV DA	794-7⁄8 255 (300-7⁄8)			
LNAV/ VNAV DA	881-1½ 342 (400-1½)			
LNAV MDA	980-1	441 (500-1)	980-1¾	441 (500-1¾)
CIRCLING	1000-1	456 (500-1)	1160-1¾ 616 (700-1¾)	1200-2 656 (700-2)

ELEV 544

D TDZE 539

REIL Rwy 11

HIRL Rwy 11-29

MIRL Rwy 17-35