



VORTAC TOY 116.0 Chan 107	APP CRS 142°	Rwy Ldg TDZE Apt Elev	N/A N/A 544
---	------------------------	-----------------------------	--

VOR-A
ST LOUIS RGNL (ALN)

T When local altimeter setting not received, use St Louis Lambert Intl
A altimeter setting and increase all MDA 60 feet and increase Circling
Cat C/D visibility $\frac{1}{4}$ SM. When VGSI inop, Circling to Rwy 17/35 NA
at night.

MISSED APPROACH: Climbing left turn to 2200
via TOY R-322 to TOPAZ INT/TOY 16 DME
and hold.

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER★ 126.0 (CTAF) 0 239.0	GND CON 120.2	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

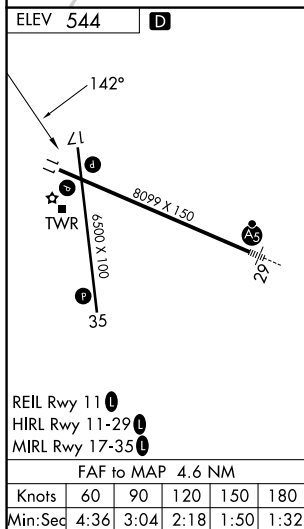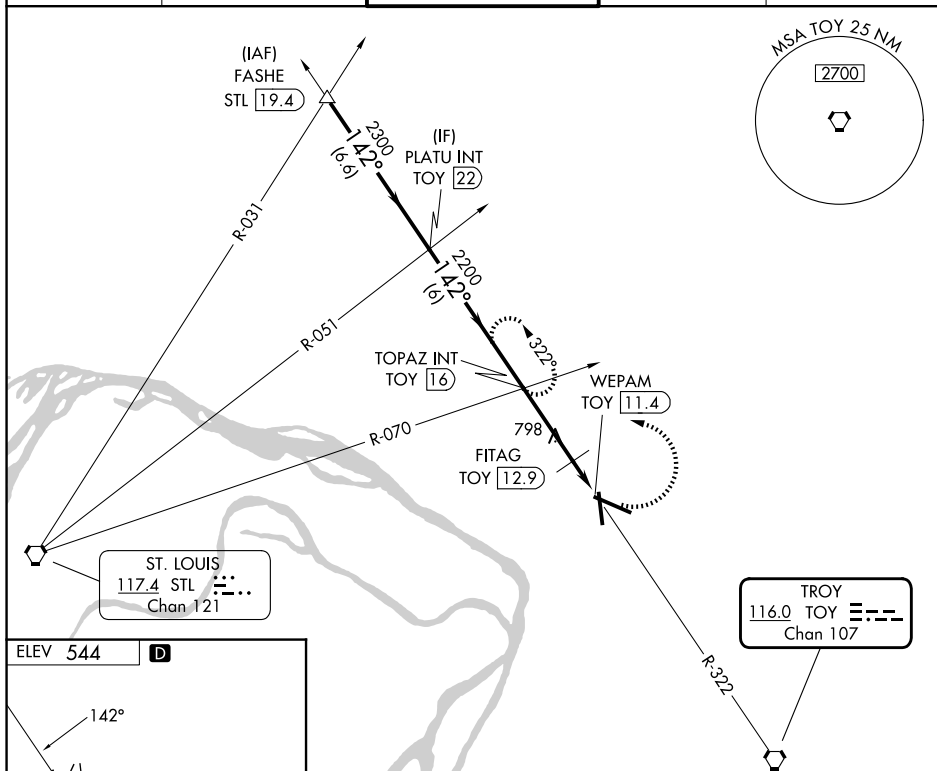

The diagram illustrates the FITAG FIX procedure. It shows a turn from 2700 to 2300 and then to 2200. The distance markers are 6.6 NM, 6 NM, 3.2 NM, and 1.4 NM. The frequency bands are A, B, C, and D. The diagram also shows the FITAG FIX MINIMUMS for each band.

CATEGORY	A	B	C	D
CIRCLING	1100-1	556 (600-1)	1160-1 $\frac{3}{4}$ 616 (700-1 $\frac{3}{4}$)	1200-2 656 (700-2)

FITAG FIX MINIMUMS

CIRCLING	1000-1	456 (500-1)	1160-1 $\frac{3}{4}$ 616 (700-1 $\frac{3}{4}$)	1200-2 656 (700-2)
----------	--------	-------------	--	-----------------------