

WAAS CH 63119 W06A	APP CRS 063°	Rwy Ldg TDZE Apt Elev	5013 394 398
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6


HARRISBURG-RALEIGH (HSB)

Baro-VNAV NA when using Williamson County Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Marion altimeter setting: increase LPV DA to 744 feet; increase LNAV/VNAV DA to 1020 feet; increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM. VDP NA with Williamson County Rgnl altimeter setting.

MISSED APPROACH:
Climb to 2000 direct JIVSO and hold.

AWOS-3PT 135.925	KANSAS CITY CENTER 127.475 346.275	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

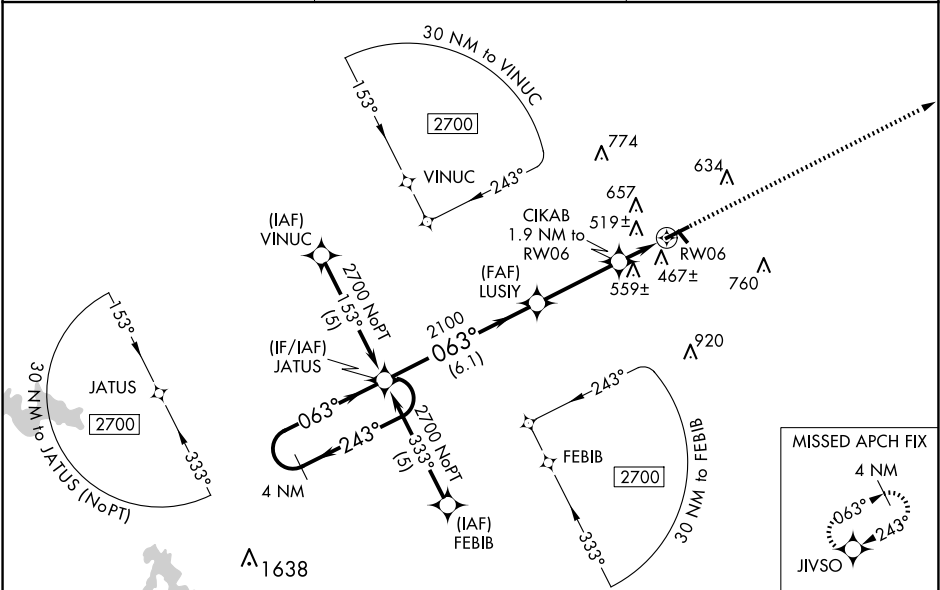

					ELEV 398		TDZE 394	
4 NM Holding Pattern JATUS 2700 ← 243° 063° → GP 3.00° TCH 35°					2000 JIVSO *LNAV only 			
LUSIY 2100 CIKAB 1.9 NM to RW06 *1.3 NM to RW06 *1020 RW06 6.1 NM 3.3 NM 0.6 NM 1.3 NM								
CATEGORY	A		B		C		D	
LPV DA	682-1		288 (300-1)					
LNAV/VNAV DA	958-2		564 (600-2)					
LNAV MDA	820-1 426 (500-1)		820-1¼ 426 (500-1¼)					
CIRCLING	900-1 502 (600-1)	1020-1 622 (700-1)	1020-1¾ 622 (700-1¾)	1080-2¼ 682 (700-2¼)				
					REIL Rwy 6 and 24 ④ MIRL Rwy 6-24 and 14-32 ④			