


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>78300</b><br><b>W27A</b> | APP CRS<br><b>269°</b> | Rwy Ldg <b>5000</b><br>TDZE <b>910</b><br>Apt Elev <b>912</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |                                       |                                                                                            |                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------|-------------------------|
| RNP APCH - GPS.<br>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Crystal altimeter setting: increase LPV DA to 1131 feet; increase LNAV/VNAV DA to 1361 feet and all visibilities ½ SM, increase all MDA 40 feet and visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Crystal altimeter setting. For inop ALS when using Crystal altimeter setting, increase LNAV Cat C/D visibility to 1 ¾ SM. |                                            | MALSR<br>                             | MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700. |                         |
| ATIS<br><b>120.625</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | MINNEAPOLIS APP CON<br><b>126.5 335.65</b> | ANOKA TOWER★<br><b>132.4 (CTAF) 0</b> | GND CON<br><b>121.85</b>                                                                   | UNICOM<br><b>122.95</b> |

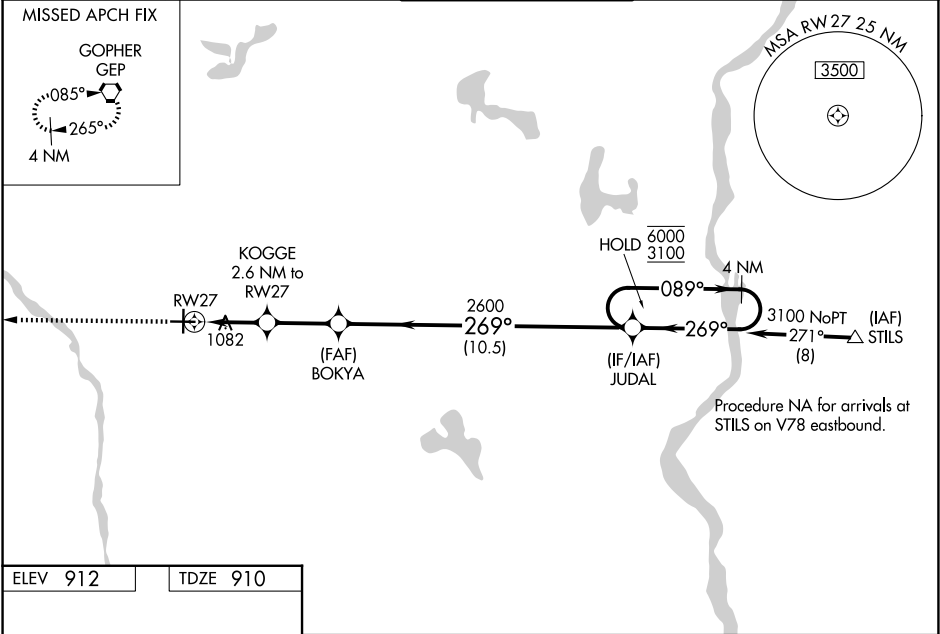

| CATEGORY     | A                  | B                    | C                  | D |
|--------------|--------------------|----------------------|--------------------|---|
| LPV DA       | 1110-½ 200 (200-½) |                      |                    |   |
| LNAV/VNAV DA | 1340-¾ 430 (500-¾) |                      |                    |   |
| LNAV MDA     | 1340-½ 430 (500-½) | 1340-¾ 430 (500-¾)   |                    |   |
| CIRCLING     | 1400-1 488 (500-1) | 1420-1½ 508 (600-1½) | 1580-2 668 (700-2) |   |

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026