

WAAS CH 50231 W05A	APP CRS 047°	Rwy Idg 5000 TDZE 429 Apt Elev 441
--	------------------------	---

RNAV (GPS) RWY 5
NORTH CENTRAL STATE (SFZ)


RNP APCH - GPS.

- T** Circling Rwy 15, 33 NA at night. For inoperative MALS, increase LPV all Cats visibility to ½ mile. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MALS

MISSED APPROACH:
Climb to 2000 then
climbing left turn to
2500 direct FOSTY
and hold.

AWOS-3PT 120.775	PROVIDENCE APP CON ★ 123.675 244.875	CLNC DEL 124.35	UNICOM 123.075 (CTAF) 0
----------------------------	--	---------------------------	-----------------------------------

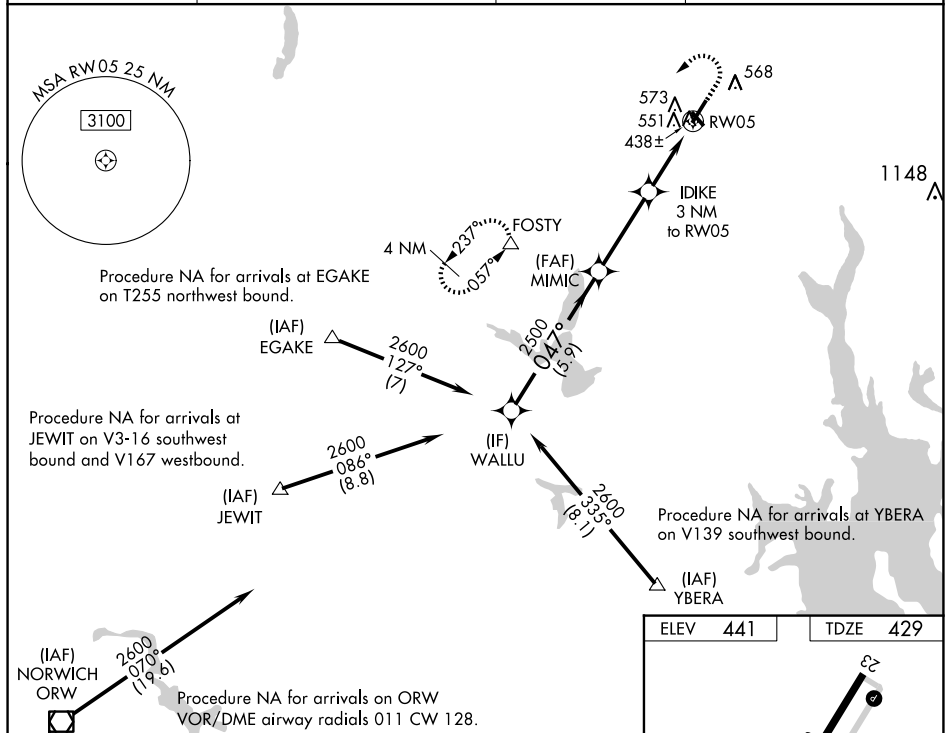

WALLU

MIMIC

IDIKE

FOSTY

RWY 05

GP 3.00° TCH 52

0.47°

2600

2500

***1420**

3 NM to RWY 05

1.1 NM to RWY 05

CATEGORY	A	B	C	D
LPV DA	700- $\frac{3}{4}$	271 (300- $\frac{3}{4}$)		NA
LNAV/VNAV DA	835-1	406 (400-1)		NA
LNAV MDA	820- $\frac{3}{4}$	391 (400- $\frac{3}{4}$)	820- $\frac{7}{8}$ 391 (400- $\frac{7}{8}$)	NA
CIRCLING	900-1	459 (500-1)	900-1 $\frac{1}{2}$ 459 (500-1 $\frac{1}{2}$)	NA

