

WAAS CH 77820 W05A	APP CRS 050°	Rwy Ldg TDZE 259 Apt Elev 262
--	------------------------	---

RNAV (GPS) RWY 5


JONESBORO MUNI (JBR)

RNP APCH.

Circling Rwy 31 NA at night. Baro-VNAV and VDP NA when using Walnut Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. Circling NA northwest of Rwy 5-23. Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Walnut Ridge altimeter setting: increase LPV DA to 593 feet and visibility ⅓ SM, and LNAV/VNAV DA to 669 feet; increase all MDAs 60 feet and visibility LNAV Cats C/D and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
PUKKO and hold.

ASOS 118.525	MEMPHIS CENTER 120.075 289.4	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

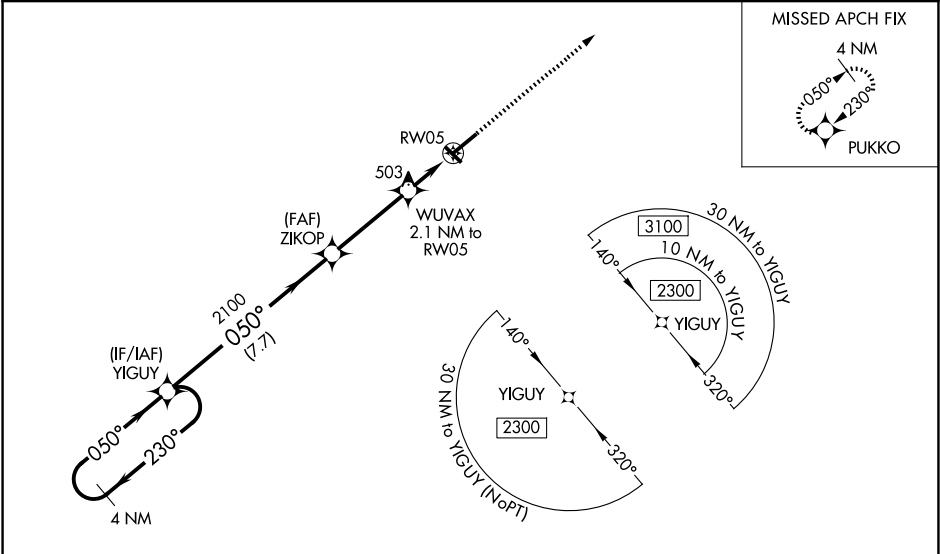

ELEV 262		TDZE 259	
4 NM Holding Pattern		2200 PUKKO	
YIGUY		ZIKOP	
2300		2100	
GP 3.00° TCH 45		WUVAX 2.1 NM to RWY 05	
230° 050°		*1.4 NM to RWY 05	
050°		RWY 05	
7.7 NM		3.6 NM	
0.7		1.4	
CATEGORY	A	B	C
LPV DA	539-7/8		280 (300-7/8)
LNAV/VNAV DA	615-1 1/8		356 (400-1 1/8)
LNAV MDA	760-1	501 (500-1)	760-1 3/8 501 (500-1 3/8)
CIRCLING	760-1	498 (500-1)	820-1 1/2 558 (600-1 1/2) 1080-2 3/4 818 (900-2 3/4)