


LOC I-VKE	APP CRS	Rwy Ldg	6400
108.7	311°	TDZE	1450
		Apt Elev	1469

ILS or LOC RWY 31


DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 3400 direct KRAMR and hold.
DME or RADAR required.			
⚠ NA VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase S-ILS 31 DA to 1711 feet; increase all MDAs 80 feet and S-LOC 31 visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. DME from DVL DME. DME use requires simultaneous reception of I-VKE and DVL DME. For inop ALS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ¾ SM. For inop ALS, increase S-LOC 31 Cat C/D visibility to 1 ¾ SM.			

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
125.875	124.2 270.3	122.8 (CTAF)

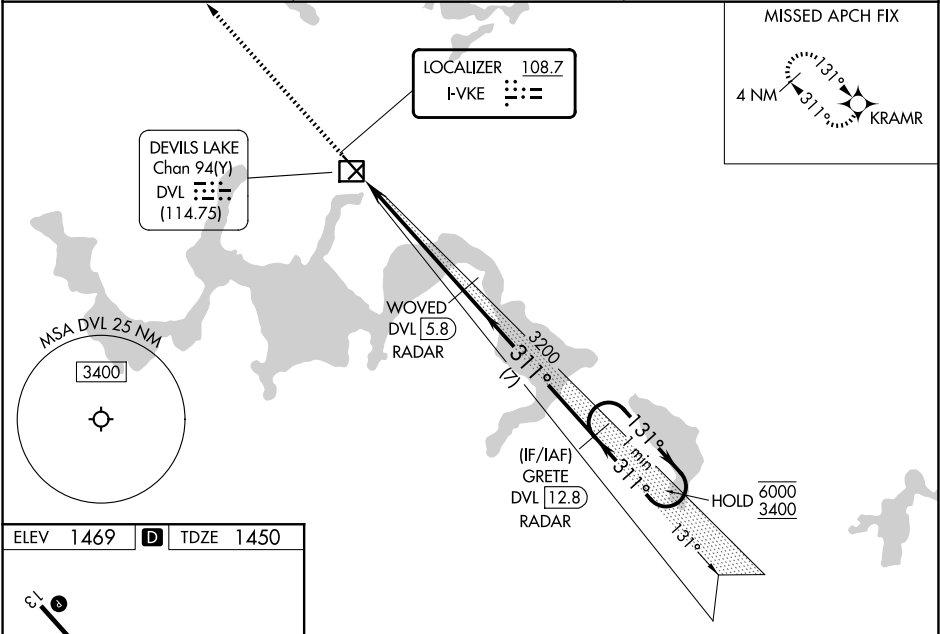

ELEV 1469		TDZE 1450
-----------	--	-----------



	3400	KRAMR	WOVED DVL 5.8	GRETE DVL 12.8	One Minute Holding Pattern
	DVL 0.5	DVL 1.8	3200	3200	6000
	1.4 NM	4 NM	7 NM		3400
CATEGORY	A	B	C	D	
S-ILS 31	1650-½		200 (200-½)		
S-LOC 31	1920-½ 470 (500-½)		1920-1 470 (500-1)		
CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼)		2240-2½ 771 (800-2½)