


APP CRS	Rwy Ldg	4897
245°	TDZE	326
	Apt Elev	331

RNAV (RNP) Z RWY 24

MC CLELLAN-PALOMAR (CRQ)

RNP AR APCH - GPS. Authorization required. From PALCI or EGIVE: RF, from CARCA, PALCI, URIJI, or WAGAV: min RNP 0.30. From JLI VORTAC: min RNP 0.60.	MALSR	MISSED APPROACH: Climb to 2000 on track 245° to IBUGE and hold.
For uncompensated Baro-VNAV systems, procedure NA below 5°C or above 54°C. For inop ALS increase RNP 0.10 visibility to RVR 6000 and RNP 0.30 visibility to 1 3⁄4 SM all Cats.		

ATIS 120.15	SOCAL APP CON 127.3 323.0	PALOMAR TOWER★ 118.6 (CTAF) 0 276.4	GND CON 121.8
----------------	------------------------------	--	------------------

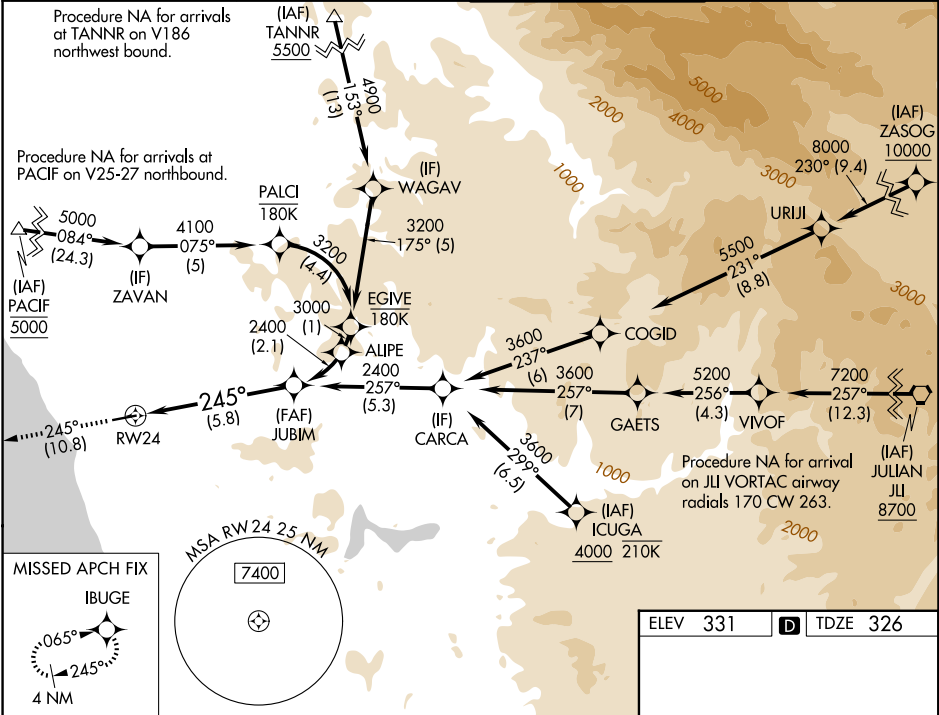

2000 ↑ tr 245°	IBUGE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.20/TCH 54). See planview for multiple IF locations.	JUBIM 2400	
RW24 245° 2400 GP 3.30° TCH 55°				
5.8 NM				
CATEGORY	A	B	C	D
RNP 0.10 DA	745/40 419 (500-3⁄4)			
RNP 0.30 DA	931-1 3⁄8 605 (600-1 3⁄8)			
AUTHORIZATION REQUIRED				

HIRL Rwy 6-24