

LOC/DME I-DLL
109.15
Chan **28**(Y)

APP CRS
010°

Rwy Idg **5010**
TDZE **979**
Apt Elev **979**

LOC RWY 1

BARABOO/WISCONSIN DELLS RGNL (DLL)

DME required.

NA


Circling NA to Rwys 14 and 32.
Rwy 1 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 4000 direct DLL VORTAC and hold, continue climb-in-hold to 4000.

AWOS-3
118.325

MADISON APP CON ★
135.45 343.7

UNICOM
123.05(CTAF) **0**

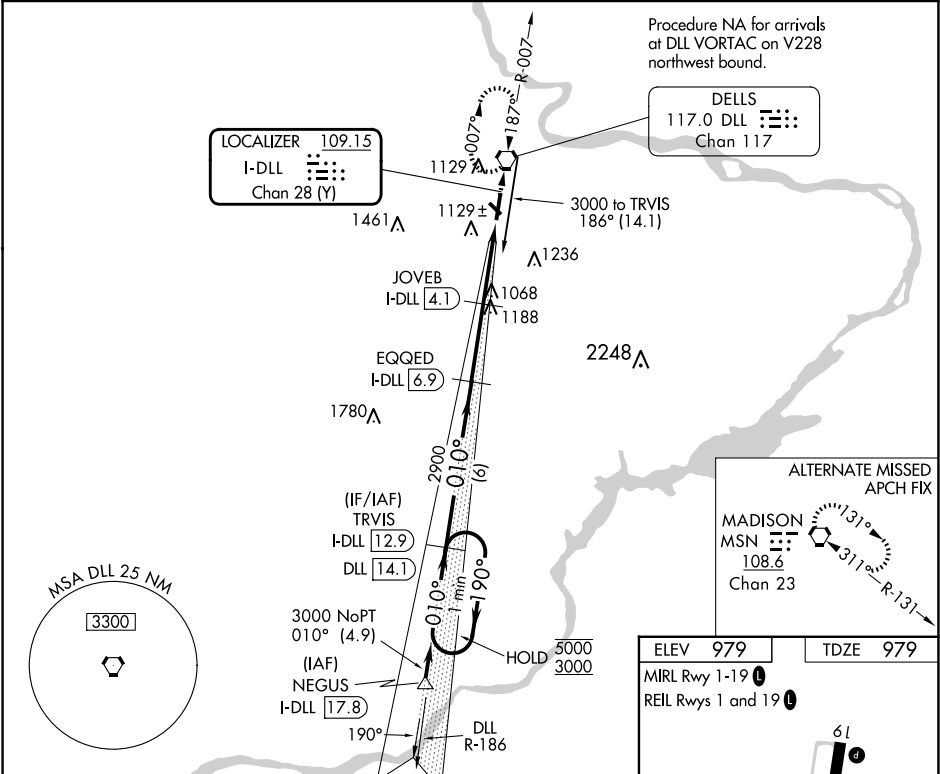

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 32).

One Minute Holding Pattern

5000 ← 190°
3000 → 010°

Use I-DLL DME when on the localizer course.

TRVIS I-DLL 12.9
EQQED I-DLL 6.9
JOVEB I-DLL 4.1
I-DLL 2.2
I-DLL 1

3.00° TCH 40
2900
2000

6 NM 2.8 NM 1.9 NM 1.2 NM

CATEGORY	A	B	C	D
S-1	1380-1 401 (500-1)		1380-1⅛ 401 (500-1⅛)	NA
CIRCLING	1520-1 541 (600-1)		1580-1¾ 601 (700-1¾)	NA

61
2725 X 100
5010 X 100
010°