


ATIS
132.4
GND CON
121.65
WAUKEGAN TOWER*
120.05 273.55
DEP CON
120.55

TOP ALTITUDE:
3000

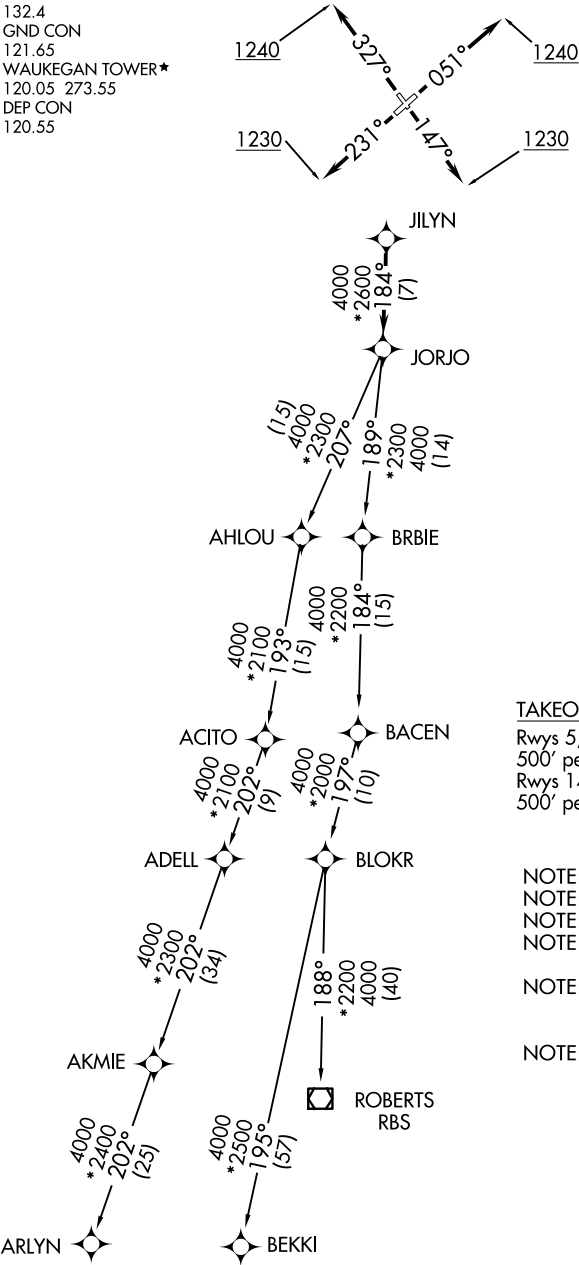

TAKEOFF MINIMUMS
Rwys 5, 32: Standard with minimum climb of 500' per NM to 1240.
Rwys 14, 23: Standard with minimum climb of 500' per NM to 1230.

- NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: TURBOJET departures maintain 250K until advised by ATC.
NOTE: AKMIE transition: for aircraft inbound to BML, SPI, or PIA, or as assigned by ATC.
NOTE: ROBERTS transition: for aircraft inbound to CMI or STL, or as assigned by ATC.

(NARRATIVE ON FOLLOWING PAGE) NOTE: Chart not to scale.

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026