

WAAS CH 70302 W16A	APP CRS 161°	Rwy Ldg 6200 TDZE 192 Apt Elev 192
--	------------------------	---

RNAV (GPS) RWY 16L

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1 3/8 SM.

MALSR



MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8
------------------------	---	--	-------------------------

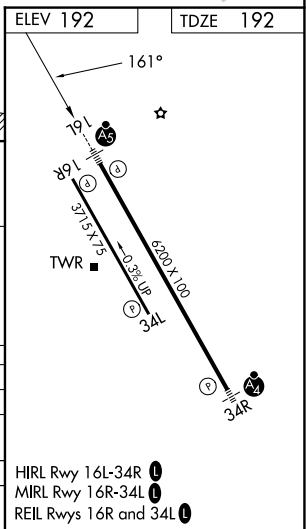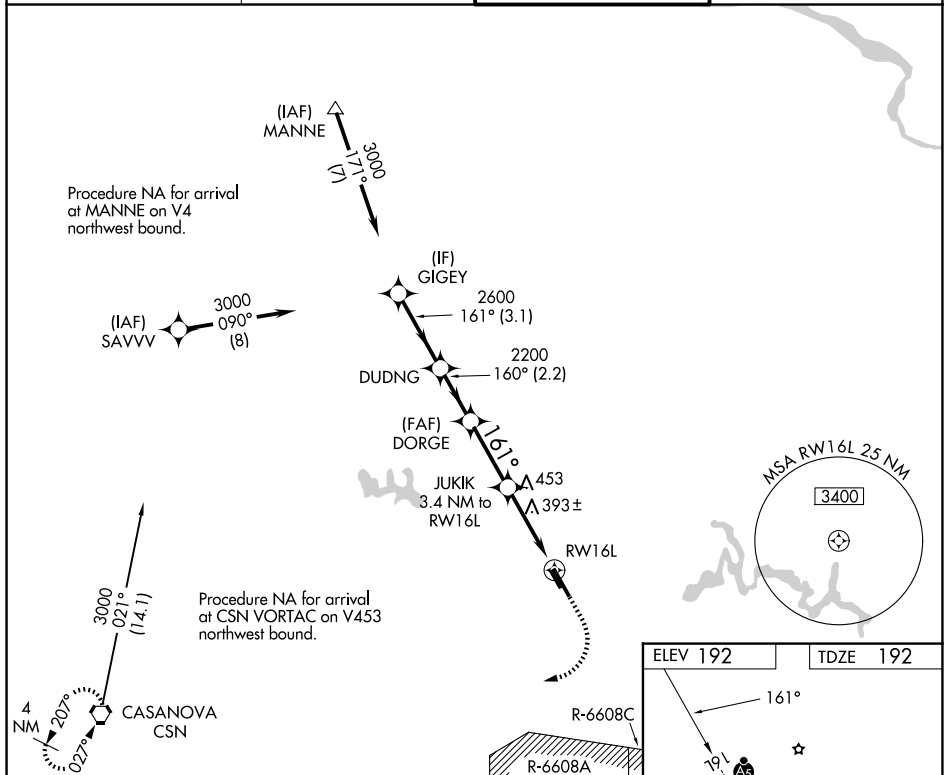

RNAV (GPS) RWY 16L

NE-3, 25 DEC 2025 to 22 JAN 2026