

WAAS CH 53305 W09A	APP CRS 094°	Rwy ldg TDZE 19 Apt Elev 19
--	------------------------	---


RNAV (GPS) RWY 9

CHARLESTON EXEC (JZI)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Baro-VNAV and VDP NA when using Charleston AFB/Intl altimeter setting. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase LPV DA to 251 feet; increase LNAV/VNAV DA to 346 feet and all MDAs 40 feet; increase LNAV Cats C/D ¼ SM and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH:
Climb to 2100 direct GEGDE and hold.

AWOS-3 123.775	CHARLESTON APP CON 120.7 306.925	CLNC DEL 119.85	UNICOM 122.8 (CTAF) ①
--------------------------	--	---------------------------	---------------------------------

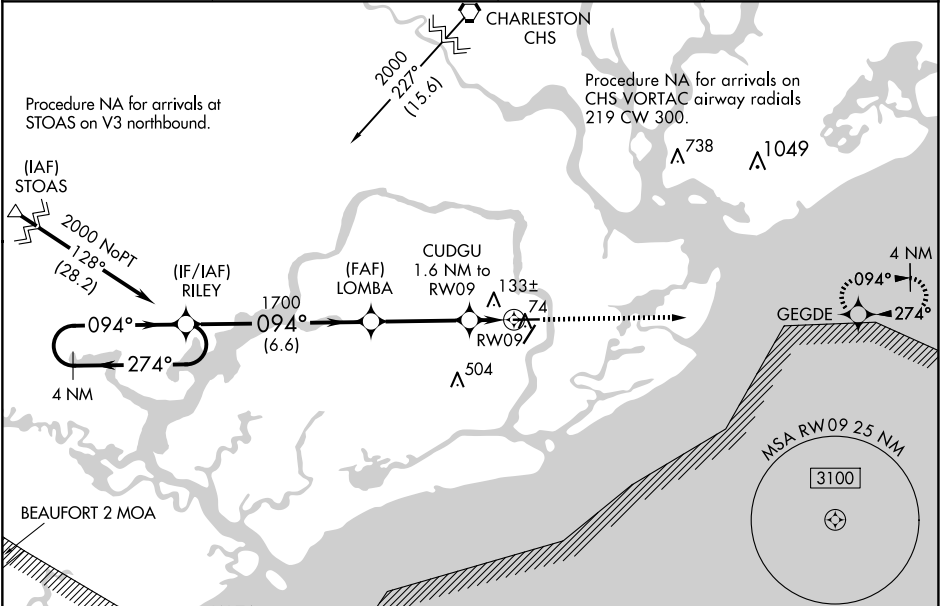

ELEV 19		TDZE 19	
---------	--	---------	--

4 NM Holding Pattern RILEY

2000 ← 274° 094° →

GP 3.00° TCH 51

LOMBA 1700

CUDGU 1.6 NM to RW09

* 580

* 1.1 NM to RW09

RW09

* LNAV only

↑ 2100 GEGDE

094° to RW09

5350 X 100

4313 X 150

CATEGORY	A	B	C	D
LPV DA		219-¾	200 (200-¾)	
LNAV/VNAV DA		314-1	295 (300-1)	
LNAV MDA	400-1	381 (400-1)	400-1½	381 (400-1½)
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	860-2½ 841 (900-2½)	860-2¾ 841 (900-2¾)

REIL Rwy 9 and 27 ①
MIRL Rwy 4-22 ①
HIRL Rwy 9-27 ①