




EC-2, 25 DEC 2025 to 22 JAN 2026

CLEVELAND DEP CON 125.35 346.325	RNAV 1 - DME/DME/IRU or GPS.
ATIS 125.25	RADAR required.
CINC DEL 339.8	
121.9 (when twr closed)	
GND CON 121.9 339.8	
LAKEFRONT TOWER ★ 124.3 (CTAF) 339.8	

NOTE: Rwy 6R/24L: Takeoff minimums NA when control tower closed.

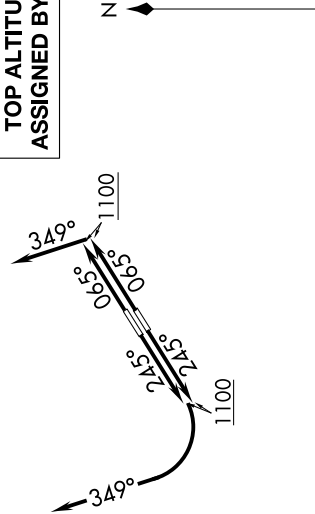

TAKEOFF MINIMUMS:
Rwys 6L, 24R: Standard with minimum climb of 500' per NM to 1100.
Rwys 6R: Standard with minimum climb of 500' per NM to 1100. NA when control tower closed.
Rwy 24L: 400-1 3/4 or standard with minimum climb of 757' per NM to 1000. NA when control tower closed.

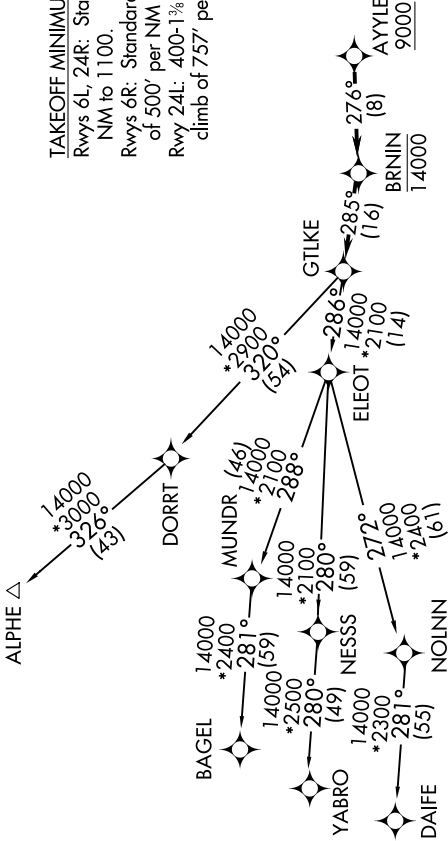

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

EC-2, 25 DEC 2025 to 22 JAN 2026