

VOR/DME FFM
110.4
Chan **41**

APP CRS
115°

Rwy Ldg
TDZE **1182**
Apt Elev **1183**

VOR RWY 13

FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)


▼

▲ NA

When local altimeter setting not received, use Elbow Lake altimeter setting and increase all MDAs 60 feet; increase Circling Cat C/D visibility ¼ SM. EBABY fix minimums increase S-13 Cat C/D and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 then left turn direct FFM VOR/DME and hold.

AWOS-3PT 119.05	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
---------------------------	--	--

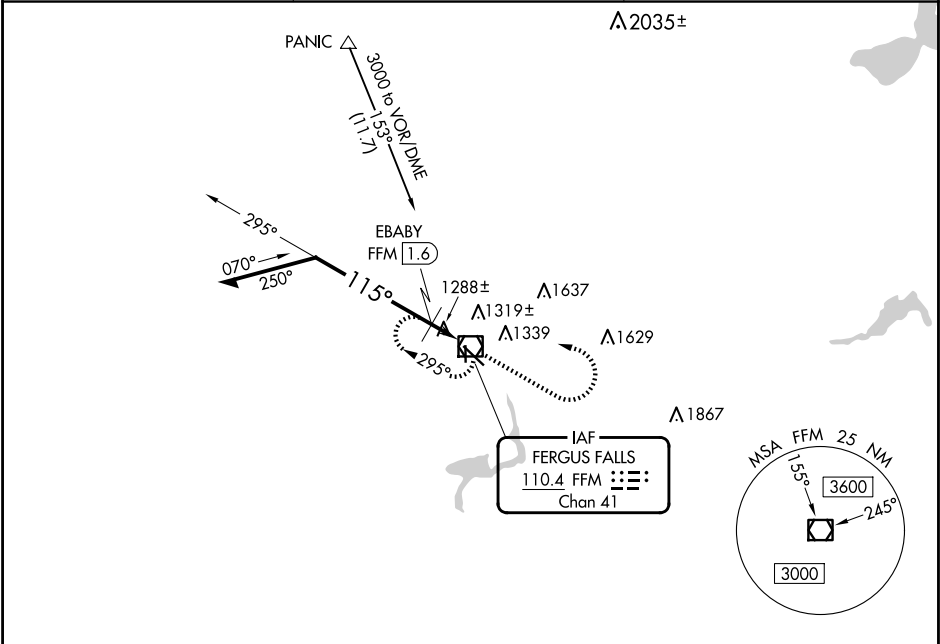

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 52).

Remain within 10 NM

2900

295°

115°

EBABY FFM 1.6

2.75°

TCH 50

*1640

1.6 NM

3000

FFM VOR/DME

*1700 when using Elbow Lake altimeter setting.

FFM

CATEGORY	A	B	C	D
S-13	1640-1	458 (500-1)	1640-1 ³ / ₈	458 (500-1 ³ / ₈)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1 ³ / ₄ 637 (700-1 ³ / ₄)	1940-2 ¹ / ₂ 757 (800-2 ¹ / ₂)
EBABY FIX MINIMUMS				
S-13	1580-1	398 (400-1)	1580-1 ¹ / ₈	398 (400-1 ¹ / ₈)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1 ³ / ₄ 637 (700-1 ³ / ₄)	1940-2 ¹ / ₂ 757 (800-2 ¹ / ₂)

ELEV 1183

TDZE 1182

115°

41

3299 X 75

0.7% UP

35

3639 X 100

31

REIL Rwy 13 and 35

MRL Rwy 13-31 and 17-35