

WAAS CH 58204 W17A	APP CRS 168°	Rwy Idg 6501 TDZE 17 Apt Elev 17
--	------------------------	---


RNAV (GPS) RWY 17
TRENT LOTT INTL (PQL)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
When local altimeter setting not received, use Mobile Rgnl altimeter setting; increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet; increase LNAV/VNAV all visibilities 1/8 SM. Increase all MDA 80 feet and LNAV Cat C/D visibility 1/4 SM and Circling Cat C/D visibility 1/2 SM. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For inop ALS when using Mobile Rgnl altimeter setting increase LPV all Cats visibility to 1/8 SM.

MALSR
MISSED APPROACH:
Climb to 800 then climbing left turn to 1800 direct BEZJU and hold.

ATIS 135.175	MOBILE APP CON ★ 121.0 307.1	TRENT LOTT TOWER ★ 118.575 (CTAF) 0	GND CON 121.725	CLNC DEL 121.725	UNICOM 122.8
------------------------	--	---	---------------------------	----------------------------	------------------------

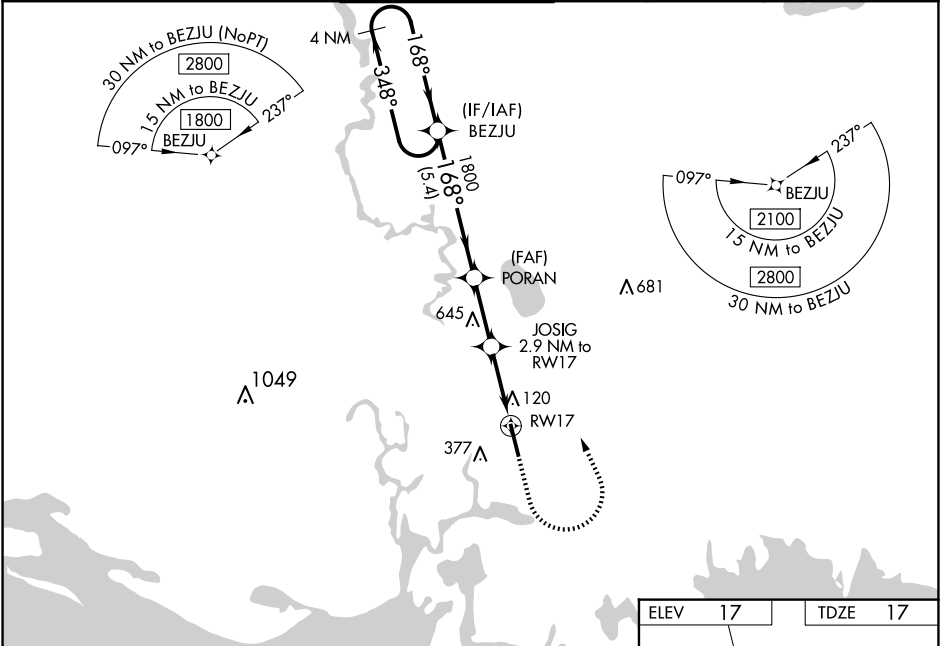

4 NM Holding Pattern		BEZJU	PORAN	JOSIG	1800	800	1800	BEZJU
1800 ← 348°		168° →	1800	2.9 NM to RWY17	980	1 NM to RWY17		
GP 3.00°								
TCH 50								
		5.4 NM	2.5 NM	1.9 NM	1 NM			
CATEGORY		A	B	C	D			
LPV DA		217-1/2		200 (200-1/2)				
LNAV/ VNAV DA		282-1/2		265 (300-1/2)				
LNAV MDA		380-1/2		363 (400-1/2)		380-5/8	363 (400-5/8)	
CIRCLING		480-1		680-1		680-1 3/4	680-2	
		463 (500-1)		663 (700-1)		663 (700-1 3/4)	663 (700-2)	

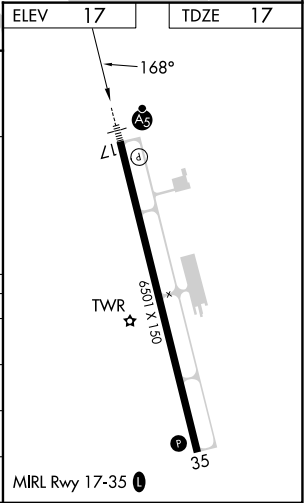

SC-4, 25 DEC 2025 to 22 JAN 2026

SC-4, 25 DEC 2025 to 22 JAN 2026