

WAAS CH 40237 W14A	APP CRS 141°	Rwy Idg TDZE 1117 Apt Elev 1122	3851
--	------------------------	---	-------------


RNAV (GPS) RWY 14

WEBSTER CITY MUNI (EBS)


Baro-VNAV NA when using Clarion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clarion altimeter setting and increase all DAs 49 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1⁄8 mile. Helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH: Climb to 3000 direct OLT OE and hold.

AWOS-3 127.825	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

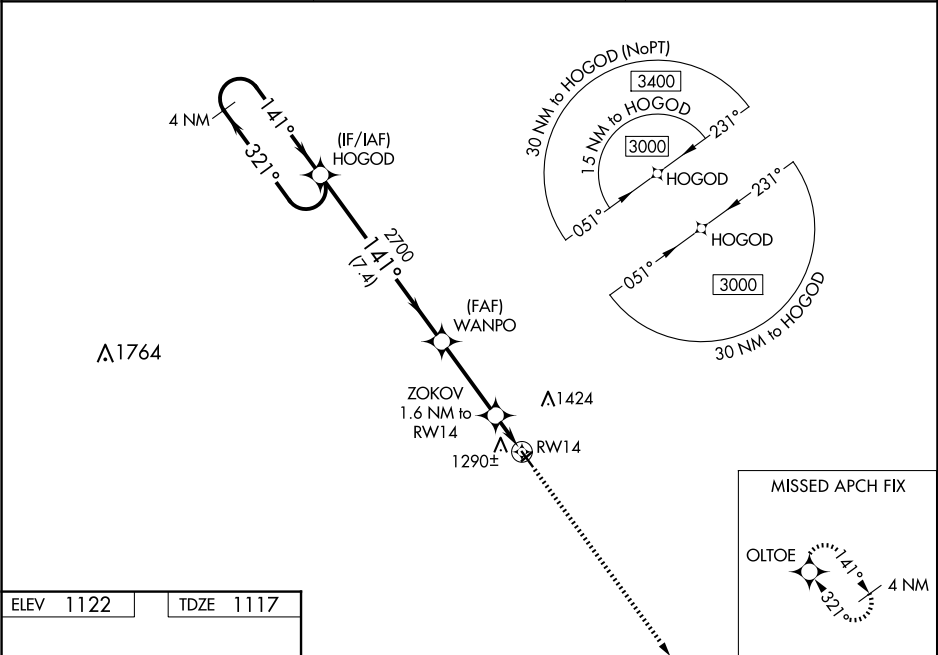

ELEV 1122	TDZE 1117
------------------	------------------

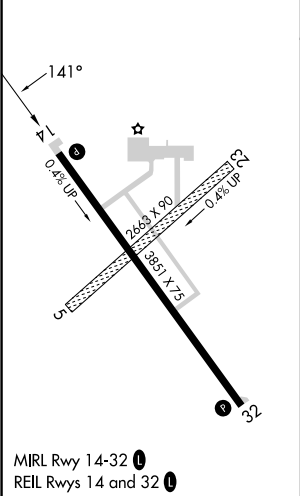

4 NM Holding Pattern HOGOD				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 32).		3000 ↑	OLTOE ✦
3000 ← 321° 141° →				141°	2700 WANPO	ZOKOV 1.6 NM to RW14	*LNAV only
GP 3.00° TCH 40				2700	*1640	RW14	
				7.4 NM	3.3 NM	1.6 NM	
CATEGORY	A	B	C	D			
LPV DA	1367-1	250 (300-1)	NA				
LNAV/VNAV DA	1463-1¼	346 (400-1¼)	NA				
LNAV MDA	1540-1	423 (500-1)	NA				
 CIRCLING	1600-1	478 (500-1)	NA				