


WAAS CH 82231 W11A	APP CRS 110°	Rwy Idg TDZE 482 Apt Elev 482
--	------------------------	---

RNAV (GPS) RWY 11

OLNEY-NOBLE (OLY)

RNP APCH.	▼ Baro-VNAV NA when using Evansville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use ▲ Evansville altimeter setting and increase all DAs 126 feet, MDAs 140 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D ¾ SM and Circling Cat C ¼ SM and Cat D ½ SM.	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FOYWU and hold.
-----------	---	---

AWOS-3 119.275	KANSAS CITY CENTER 124.3 269.15	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

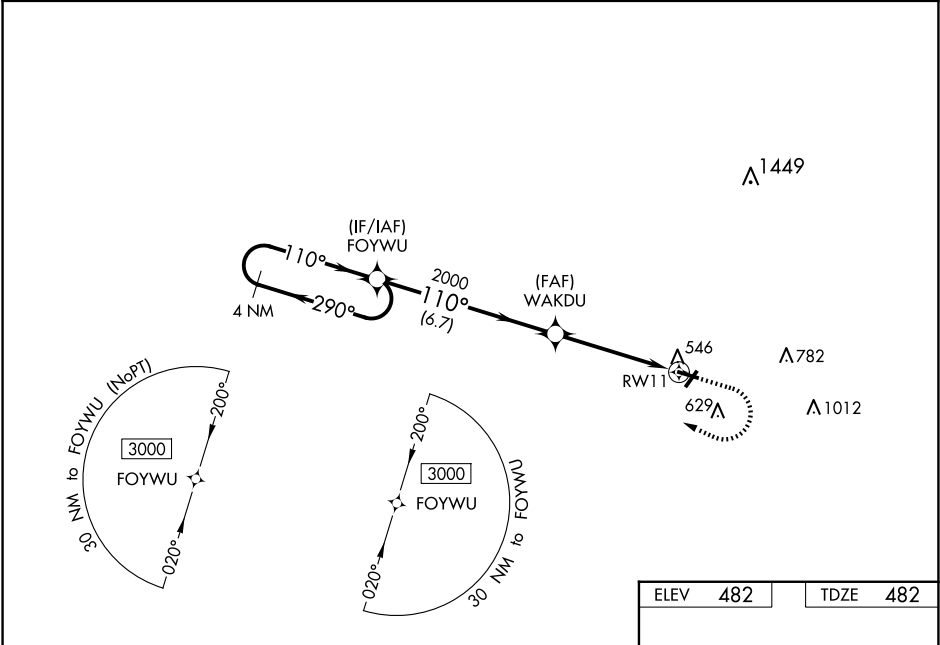

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).

4 NM Holding Pattern

FOYWU

WAKDU

RW11

3000

2000

2000

290°

110°

110°

GP 3.00°

TCH 40

6.7 NM

4.6 NM

ELEV 482

TDZE 482

FOYWU

WAKDU

RW11

1500

3000

4099 X 75

0.3% UP

2598 X 60

110°

22

29

REIL Rwy 4 and 11 0

MIRL Rwy 4-22 and 11-29 0

CATEGORY	A	B	C	D
LPV DA	732-1 250 (300-1)			
LNAV/VNAV DA	962-1½ 480 (500-1½)			
LNAV MDA	920-1 438 (500-1)	920-1¼ 438 (500-1¼)		
CIRCLING	960-1 478 (500-1)	960-1½ 478 (500-1½)	1180-2¼ 698 (700-2¼)	