

WAAS CH 87130 W35A	APP CRS 353°	Rwy Ldg TDZE 580 Apt Elev 592
--	------------------------	---

RNAV (GPS) RWY 35

MC GREGOR EXEC (PWG)

RNP APCH - GPS

▼


⚠

ASR


Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 861 feet; increase LNAV/VNAV DA to 861 feet; increase all MDAs 40 feet and LNAV visibility Cat B ¼ SM, and Circling visibility Cat B/C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.

AWOS-3PT 135.525	WACO APP CON★ 127.65 352.0	UNICOM 123.05 (CTAF) 0
----------------------------	--------------------------------------	----------------------------------

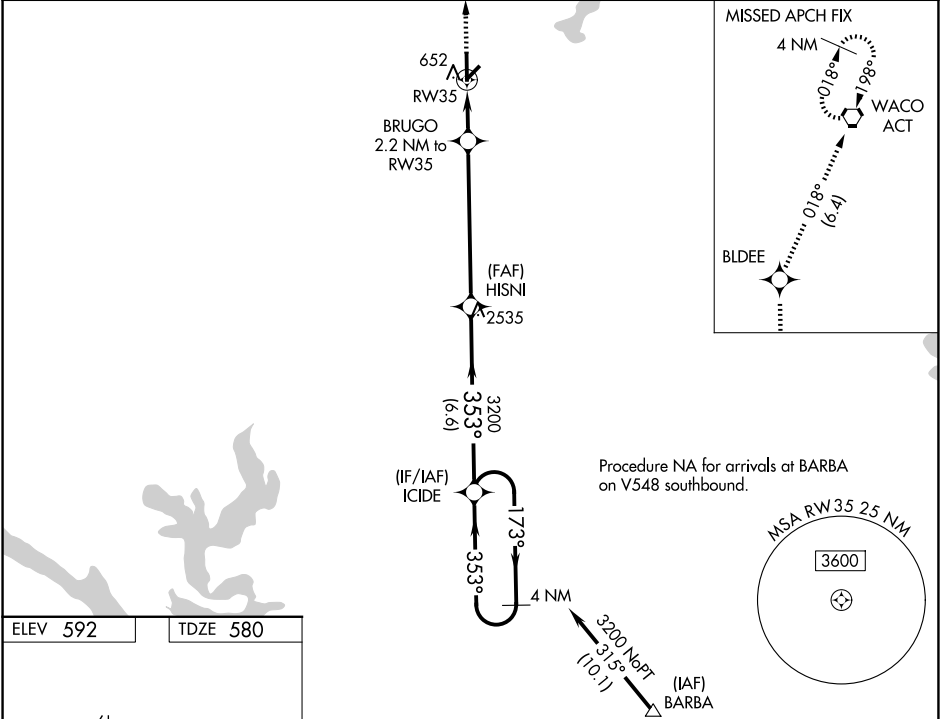

ELEV 592	TDZE 580
----------	----------

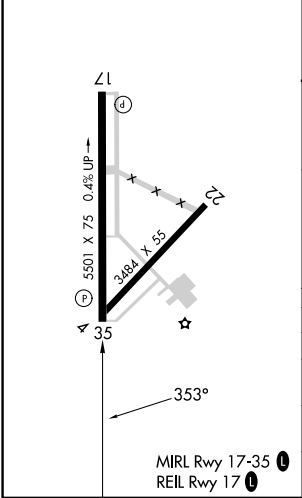

2500	BLDEE	tr 018°	ACT	HISNI	ICIDE	4 NM Holding Pattern
				3200		
				BRUGO 2.2 NM to RW35		
				1300		
				353°	173°	3200
				3200	353°	
				2.2 NM	5.9 NM	6.6 NM
CATEGORY	A	B	C	D		
LPV DA	830-¾	250 (300-¾)		NA		
LNAV/VNAV DA	830-¾	250 (300-¾)		NA		
LNAV MDA	960-1	380 (400-1)	960-1⅛ 380 (400-1⅛)	NA		
CIRCLING	1020-1 428 (500-1)	1060-1 468 (500-1)	1300-2 708 (800-2)	NA		