

ATIS
128.375
CLNC DEL
119.45
GND CON
121.8 239.0
HOOKS TOWER ★
127.4 354.1 (EAST)
118.4 (CTAF) 354.1 (WEST)
HOUSTON DEP CON
119.7 281.4

TOP ALTITUDE:
ASSIGNED BY ATC

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwys 17L, 35R: NA - Environmental.
Waterways 17, 35: NA - Air Traffic.
Rwys 17R, 35L: Standard with minimum
climb of 500' per NM to 660.


▼ DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 17R: Climb on heading
168° to 660 for RADAR vectors to
DREMR, thence. . .

TAKEOFF RUNWAY 35L: Climb on heading
348° to 660 for RADAR vectors to
DREMR, thence. . .

. . . on track 345° to LITLD, then on track
346° to BLTWY, then on (transition).
Maintain ATC assigned altitude. Expect
filed altitude 10 minutes after departure.

CRIED TRANSITION (BLTWY7.CRIED)

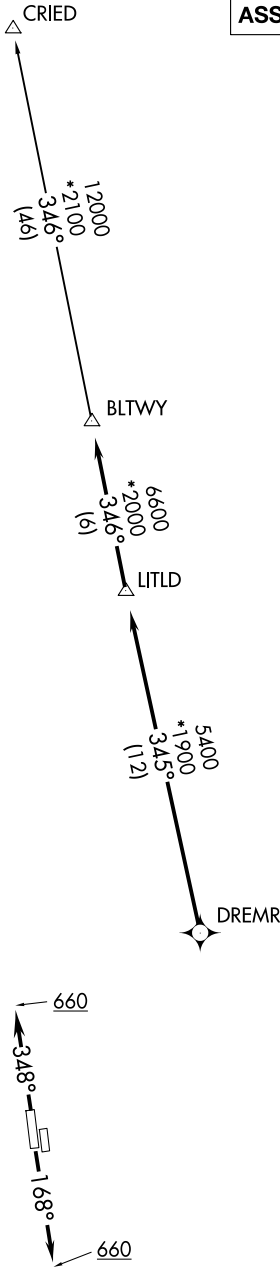

NOTE: Chart not to scale.

SC-5, 25 DEC 2025 to 22 JAN 2026

SC-5, 25 DEC 2025 to 22 JAN 2026