


TOP ALTITUDE:
ASSIGNED BY ATC


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.



(MIGGY3.MIGGY) 24137
MIGGY THREE DEPARTURE (RNAV) AL-5506 (FAA)

ANN ARBOR MUNI (ARB)
ANN ARBOR, MICHIGAN

ATIS
134.55
CLNC DEL
121.6
GND CON
121.6
ANN ARBOR TOWER ★
120.3 (CTAF)
DETROIT DEP CON
118.95 284.0

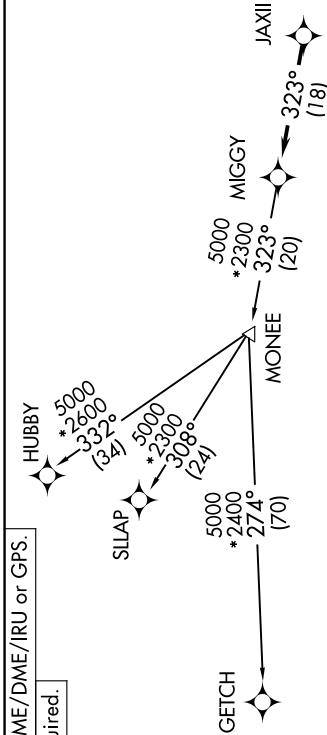

TAKEOFF MINIMUMS:
Rwys 1,2, 30: NA - Environmental.
Rwys 6, 24: Standard.

NOTE: Jet departures at/above 10000,
maintain 280K until advised by ATC.
NOTE: GETCH TRANSITION: For use by KMKE area
arrivals only, or as assigned by ATC.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 060° or as assigned by ATC, thence....
TAKEOFF RUNWAY 24: Climb on heading 240° or as assigned by ATC, thence....
....for RADAR vectors to JAXII, then on track 323° to MIGGY, then on (transition).
Maintain 17000 or as assigned by ATC, expect filed altitude 10 minutes after departure.

GETCH TRANSITION (MIGGY3.GETCH):
HUBBY TRANSITION (MIGGY3.HUBBY):
SILAP TRANSITION (MIGGY3.SILAP):



NOTE: Chart not to scale.

MIGGY THREE DEPARTURE (RNAV)
(MIGGY3.MIGGY) 16MAY24

ANN ARBOR, MICHIGAN
ANN ARBOR MUNI (ARB)