

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>97731</b><br><b>W28A</b> | APP CRS<br><b>283°</b> | Rwy Ldg <b>5006</b><br>TDZE <b>906</b><br>Apt Elev <b>906</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|


RNAV (GPS) RWY 28  
LO SIMENSTAD MUNI (OEO)

RNP APCH - GPS.

**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using Anoka County/Blaine (Jones Fld) altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Anoka County/Blaine (Jones Fld) altimeter setting: increase LPV DA to 1163 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1236 feet and visibility all Cats ¾ SM; increase all MDAs 60 feet and visibility LNAV Cat C ½ SM and Circling Cat C ¼ SM. Circling NA to Rwy 4 and 22.

**MISSED APPROACH:**  
Climb to 3000 direct  
WESUS and hold.

|                          |                                            |                       |                       |
|--------------------------|--------------------------------------------|-----------------------|-----------------------|
| AWOS-3<br><b>119.925</b> | MINNEAPOLIS APP CON<br><b>121.2 335.65</b> | GCO<br><b>121.725</b> | CTAF<br><b>122.90</b> |
|--------------------------|--------------------------------------------|-----------------------|-----------------------|

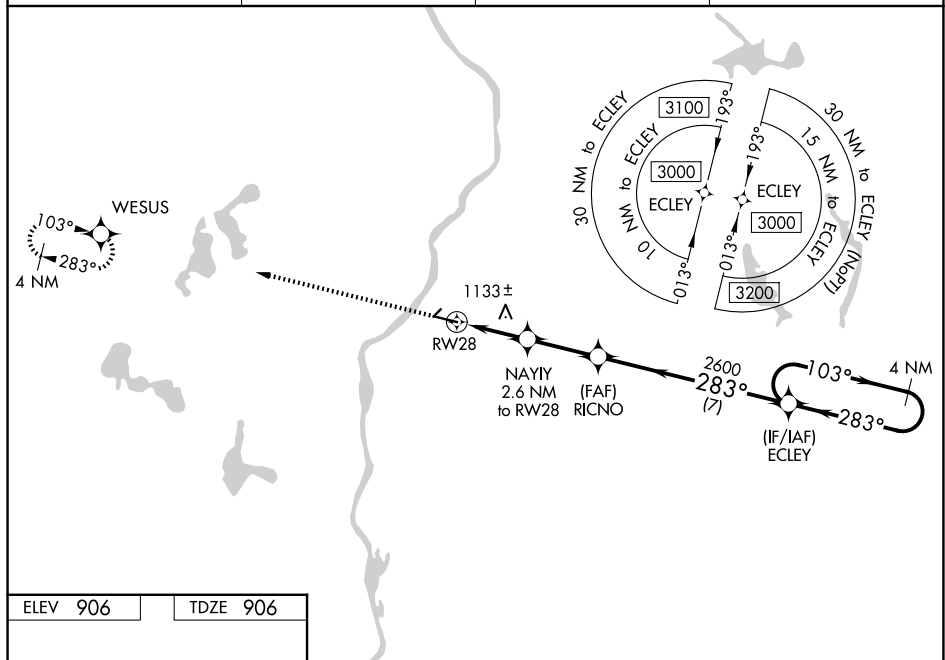

REIL Rwy 28  
MRL RWYS 10 and 28