


WAAS CH 42636 W30A	APP CRS 306°	Rwy Idg 4000 TDZE 543 Apt Elev 547
--	------------------------	---

RNAV (GPS) RWY 30
MUSCATINE MUNI (MUT)


⚠ DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. VDP and Baro-VNAV NA with Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting and increase all DA 76 feet and all MDA 80 feet, increase LNAV/VNAV all Cals visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 2600 direct YEBTY and hold.

AWOS-3P 120.625	QUAD CITY APP CON * 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

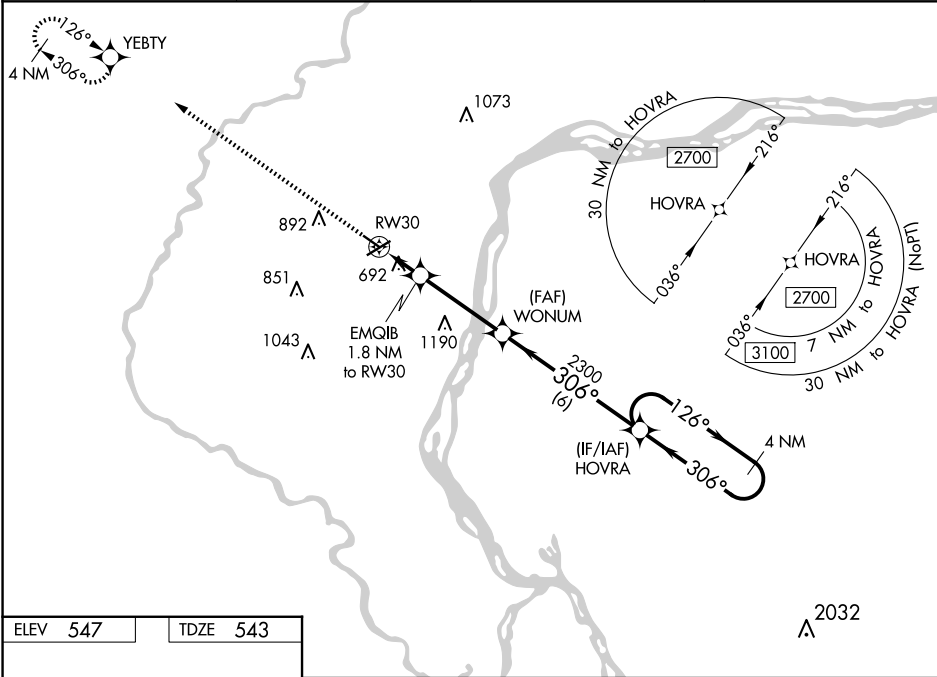

ELEV 547	TDZE 543
-----------------	-----------------

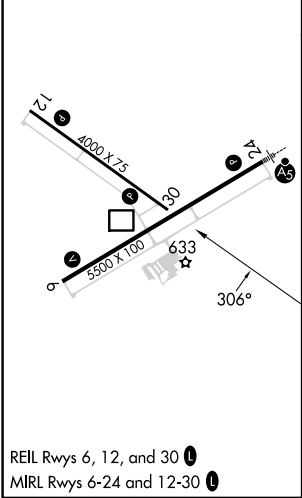

2600	YEBTY	EMQIB 1.8 NM to RW30	WONUM 2300	HOVRA	4 NM Holding Pattern
* LNAV only					
* 1.2 NM to RW30					
RW30					
1140*					
2300					
126° → 2700					
← 306°					
GP 3.00°					
TCH 40					
CATEGORY	A	B	C	D	
LPV DA	743-1	200 (200-1)	NA		
LNAV/VNAV DA	989-1½	446 (500-1½)	NA		
LNAV MDA	960-1	417 (500-1)	NA		
CIRCLING	1000-1 453 (500-1)	1200-1 653 (700-1)	NA		