

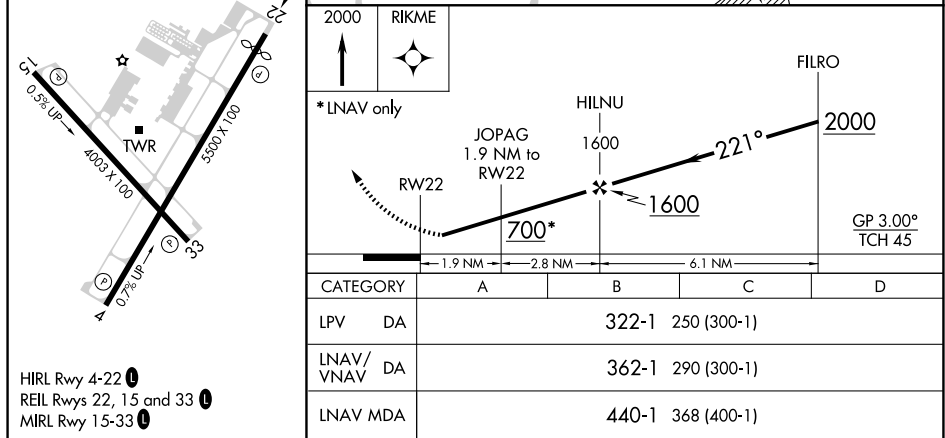
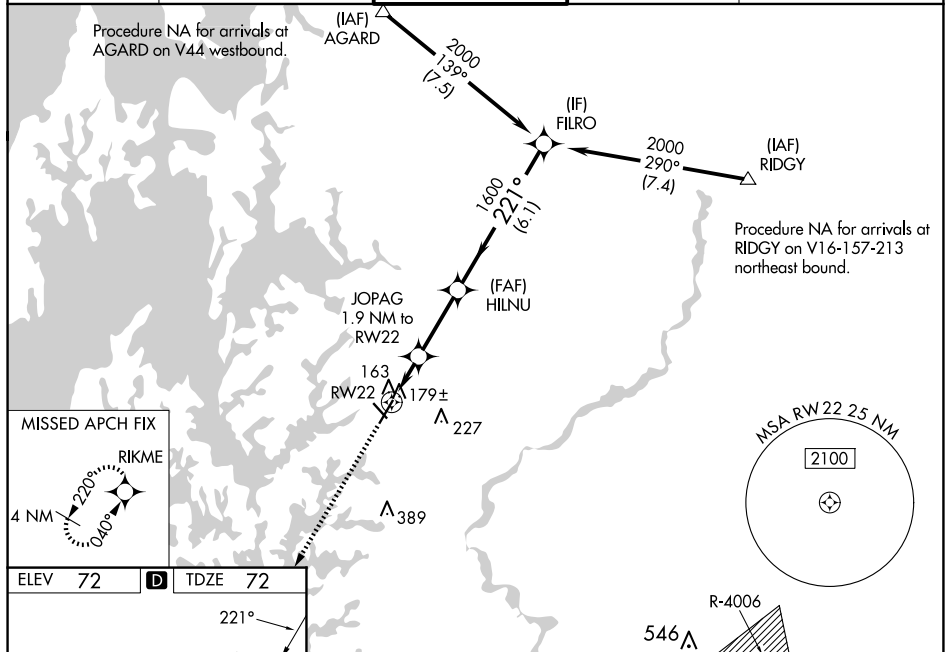
23110

RNAV (GPS) RWY 22
EASTON/NEWNAM FLD (ESN)

▼ Baro-VNAV NA when using Baltimore altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Baltimore altimeter setting and increase all DA 93 feet and all MDA 100 feet; increase LPV all Cats visibility $\frac{1}{8}$ SM, increase LNAV/VNAV all Cats visibility $\frac{1}{4}$ SM, and increase LNAV Cats C and D $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 2000 direct RIKME and hold.

ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF) 0	GND CON 119.075	CLNC DEL 119.075
------------------------	---	---	---------------------------	----------------------------

EASTON/NEWNAM FLD (ESN)
RNAV (GPS) RWY 22

NE-3, 25 DEC 2025 to 22 JAN 2026