

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>86905</b><br><b>W04A</b> | APP CRS<br><b>040°</b> | Rwy Idg <b>4775</b><br>TDZE <b>58</b><br>Apt Elev <b>72</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|


RNAV (GPS) RWY 4  
EASTON/NEWNAM FLD (ESN)

RNP APCH - GPS.

**T** When local altimeter setting not received, use Cambridge altimeter setting; increase LPV DA to 303 feet, LNAV/VNAV DA to 670 feet and visibility  $\frac{1}{8}$  SM; increase all MDAs 60 feet and visibility  $\frac{1}{8}$  SM. **A** LNAV Cat C/D and Circling Cat C  $\frac{1}{8}$  SM, and Circling Cat D  $\frac{1}{4}$  SM. VDP and Baro-VNAV NA when using Cambridge altimeter setting. Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

**MISSED APPROACH:**  
Climb to 700 then  
climbing right turn to  
2000 direct ORETE  
and hold.

|                        |                                         |                                           |                           |                            |
|------------------------|-----------------------------------------|-------------------------------------------|---------------------------|----------------------------|
| ATIS<br><b>124.475</b> | POTOMAC APP CON<br><b>133.75 254.35</b> | EASTON TOWER ★<br><b>118.525 (CTAF) 0</b> | GND CON<br><b>119.075</b> | CLNC DEL<br><b>119.075</b> |
|------------------------|-----------------------------------------|-------------------------------------------|---------------------------|----------------------------|

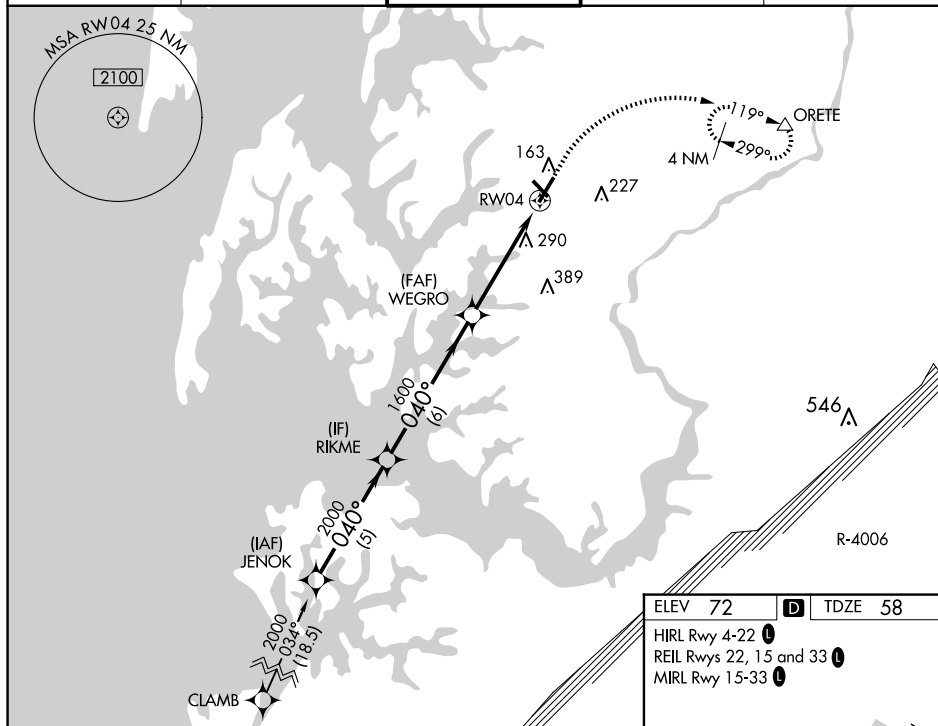

| CATEGORY     | A        | B              | C        | D              |
|--------------|----------|----------------|----------|----------------|
| LPV DA       | 258-3/4  | 200 (200-3/4)  |          |                |
| LNAV/VNAV DA | 625-15/8 | 567 (600-15/8) |          |                |
| LNAV MDA     | 600-1    | 542 (600-1)    | 600-15/8 | 542 (600-15/8) |

**CIRCLING**

|  | 600-1       | 640-1       | 640-15/8       | 740-2       |
|--|-------------|-------------|----------------|-------------|
|  | 528 (600-1) | 568 (600-1) | 568 (600-15/8) | 668 (700-2) |

