

WAAS CH 40427 W25A	APP CRS 253°	Rwy Ldg 4153 TDZE 730 Apt Elev 730
--	------------------------	---

RNAV (GPS) RWY 25

WILLIAMS COUNTY (ØG6)



▼

Δ NA

When VGSI inop, Straight-in/Circling Rwy 25 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Defiance Meml altimeter setting; when not received, use Auburn/Dekalb Exec altimeter setting: increase all MDAs 60 feet and LP and LNAV and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
POKLY and hold.

DFI ASOS 121.425	TOLEDO APP CON 134.35 307.0	UNICOM 122.8 (CTAF)	123.0
----------------------------	---------------------------------------	-------------------------------	--------------

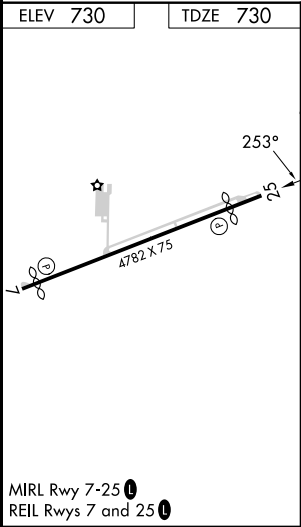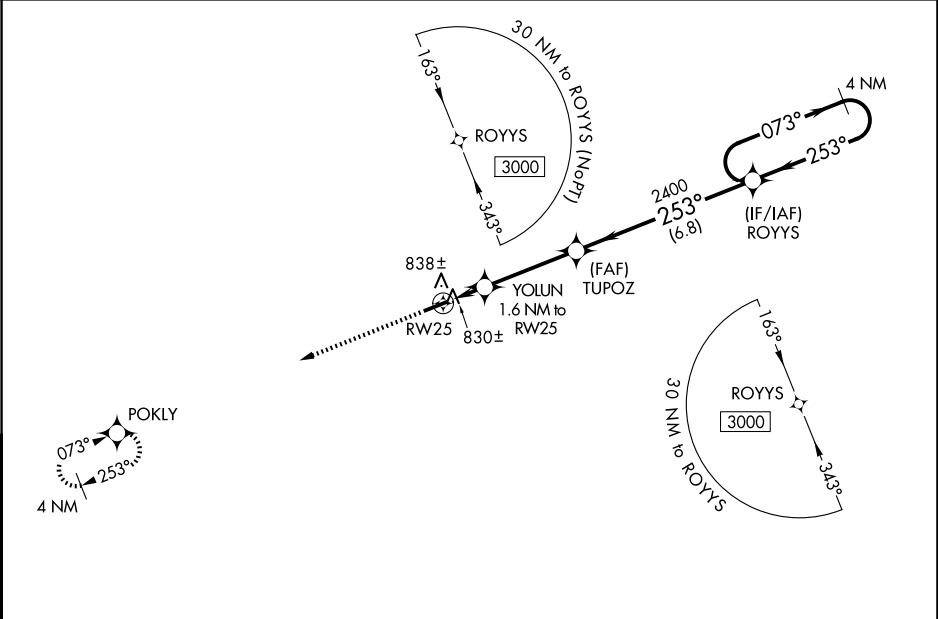

	3000	POKLY				ROYYS	4 NM Holding Pattern
			YOLUN 1.6 NM to RW25	TUPOZ			
			1260	2400			
			1.6 NM	3.5 NM	6.8 NM		
CATEGORY	A	B	C	D			
LP MDA	1 120-1	390 (400-1)	1 120-1½	390 (400-1½)			
LNAV MDA	1 140-1	410 (500-1)	1 140-1½	410 (500-1½)			
CIRCLING	1 300-1	570 (600-1)	1 300-1½	570 (600-1½)	1 520-2½	790 (800-2½)	