

NA

For inop ALS, increase S-12 Cat C/D visibilities to 1½ SM, CEGUL fix minimums: S-12 Cat C/D visibility to 1 SM. For inop ALS when using Tracy altimeter setting increase S-12 Cat C/D visibilities to 1¾ SM. When local altimeter setting not received, use Tracy Muni altimeter setting and increase all MDAs 60 feet, S-12 Cat C/D visibility ½; Circling Cat C/D visibility ¼ SM; CEGUL fix minimums: increase Circling C/D visibility ¼ SM. VDP NA when using Tracy Muni altimeter setting.

MALSR

MISSED APPROACH: Climb to 2000, then climbing left turn to 2800 direct MML VOR/DME and hold.

AWOS-3PT

120.150

MINNEAPOLIS CENTER


127.1 290.2

GCO

121.725

UNICOM

122.8 (CTAF)

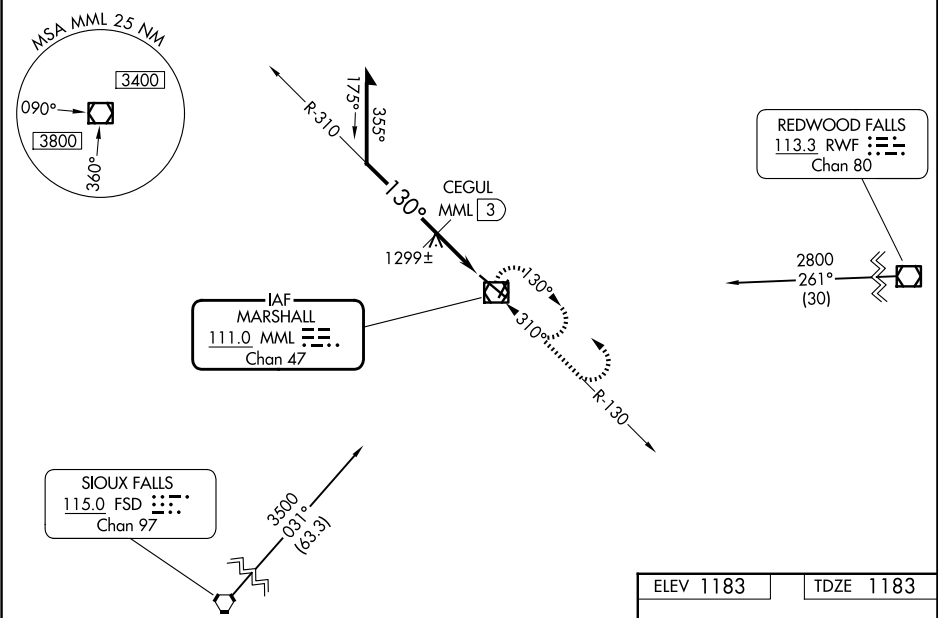

Remain within 10 NM		MML VOR/DME 6000		2000	2800	MML
2800		310°	130°	1760	130°	7221 X 100
CEGUL MML 3		1.1 NM	1.1 NM	1760	130°	3000 X 75
MML 1.9		MML 1.9		MML 1.9		2
CATEGORY	A	B	C	D		
S-12	1760-½	577 (600-½)	1760-1¼	577 (600-1¼)		
CIRCLING	1760-1	577 (600-1)	1820-1¾	637 (700-1¾)	1840-2	657 (700-2)
CEGUL FIX MINIMUMS						
S-12	1560-½	377 (400-½)	1560-¾	377 (400-¾)		
CIRCLING	1640-1	457 (500-1)	1820-1¾	637 (700-1¾)	1840-2	657 (700-2)

ELEV 1183

TDZE 1183

HIRL Rwy 12-30

REIL Rws 2 and 20

MIRL Rwy 2-20