


APP CRS	Rwy Ldg	4997
027°	TDZE	614
	Apt Elev	616


RNAV (GPS) RWY 3
CUSTER (TTF)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct OBOSE and on track 096° to MACCS and hold.
When local altimeter setting not received, use Detroit Metro Wayne County altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. Rwy 3 helicopter visibility reduction below 1 SM NA. Procedure NA at night.	

AWOS-3 119.075	DETROIT APP CON 134.3 363.2	UNICOM 122.7 (CTAF) 0
-------------------	--------------------------------	--------------------------

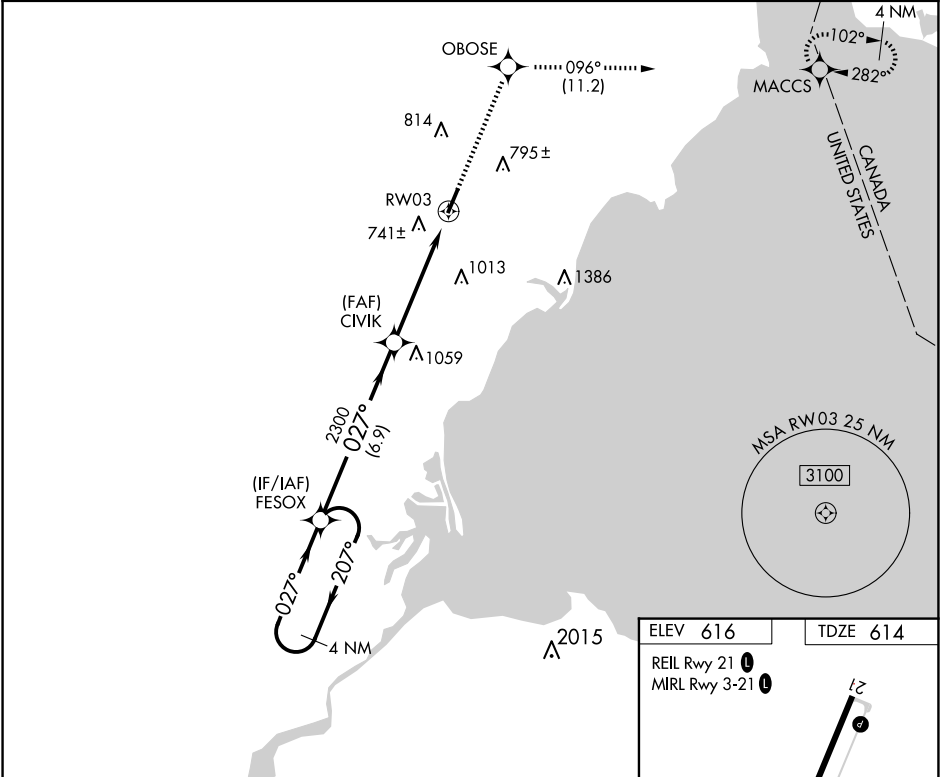

4 NM Holding Pattern	FESOX	3000	OBOSE	MACCS
3000	027°	027°	tr 096°	
VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 58).	2300	3.04° TCH 40	RWY 3	
	6.9 NM	5.1 NM		
CATEGORY	A	B	C	D
LNAV MDA	1100-1	486 (500-1)	1100-1½ 486 (500-1½)	1100-1½ 486 (500-1½)
CIRCLING	1120-1 504 (600-1)	1180-1 564 (600-1)	1380-2½ 764 (800-2½)	1380-2½ 764 (800-2½)

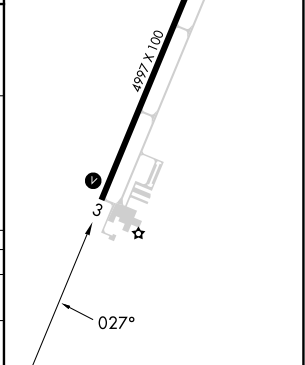

EC-1, 25 DEC 2025 to 22 JAN 2026

EC-1, 25 DEC 2025 to 22 JAN 2026