

WAAS  
CH **72619**  
**W18A**

APP CRS  
**183°**

Rwy Idg **5404**  
TDZE **173**  
Apt Elev **173**

RNAV (GPS) RWY 18

FLETCHER FLD (CKM)

RNP APCH-GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Tunica altimeter setting. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ½ SM. Circling Rwy 36 NA at night.

MISSED APPROACH:  
Climb to 2000 direct HULON and hold.

|                          |                                      |                                 |
|--------------------------|--------------------------------------|---------------------------------|
| AWOS-3<br><b>120.675</b> | MEMPHIS CENTER<br><b>135.3 335.8</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--------------------------------------|---------------------------------|

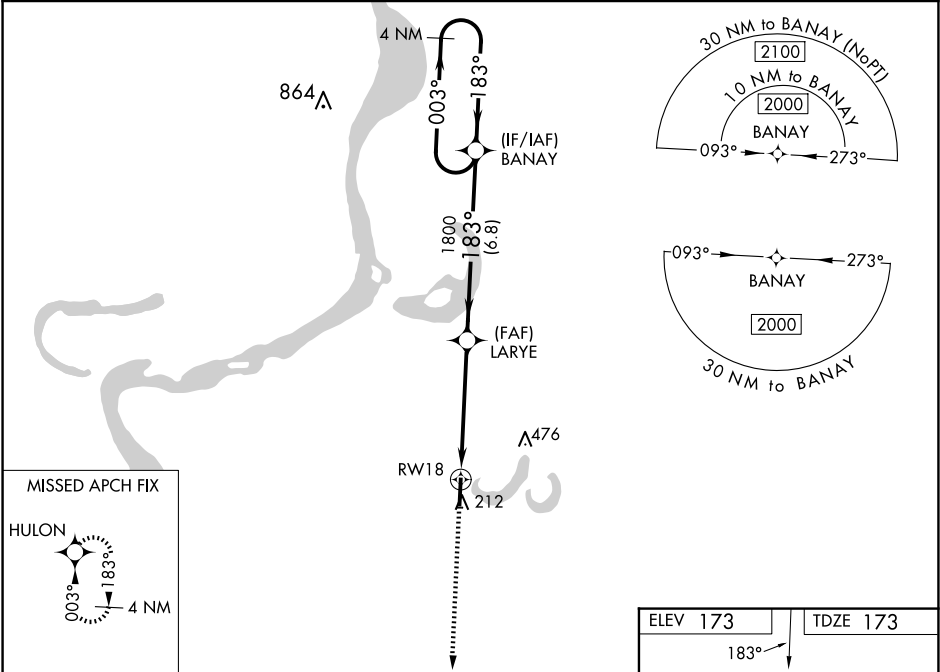

2000

↑

HULON



4 NM

Holding Pattern

1.4 NM to RW18



1.4 NM

3.6 NM

6.8 NM

LARYE

1800

BANAY

1800

003° →

← 183°

2000

GP 3.00°

TCH 40

183°

1800

|              |                         |             |                            |                      |
|--------------|-------------------------|-------------|----------------------------|----------------------|
| CATEGORY     | A                       | B           | C                          | D                    |
| LPV DA       | 423-7⁄8 250 (300-7⁄8)   |             |                            |                      |
| LNAV/VNAV DA | 587-13⁄8 414 (500-13⁄8) |             |                            |                      |
| LNAV MDA     | 640-1                   | 467 (500-1) | 640-13⁄8                   | 467 (500-13⁄8)       |
| CIRCLING     | 740-1                   | 567 (600-1) | 780-13⁄4<br>607 (700-13⁄4) | 780-2<br>607 (700-2) |

