

WAAS CH 40120 W36A	APP CRS 003°	Rwy Idg 5404 TDZE 173 Apt Elev 173
--	------------------------	---

RNAV (GPS) RWY 36


FLETCHER FLD (CKM)

RNP APCH-GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 537 feet, LNAV/VNAV DA to 508 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ⅓ SM, and LNAV Cat C/D visibility ⅓ SM. Baro-VNAV NA with Tunica altimeter setting. Straight-in/Circling Rwy 36 NA at night. Rwy 36 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 2000 direct BANAY and hold.

AWOS-3 120.675	MEMPHIS CENTER 135.3 335.8	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	--

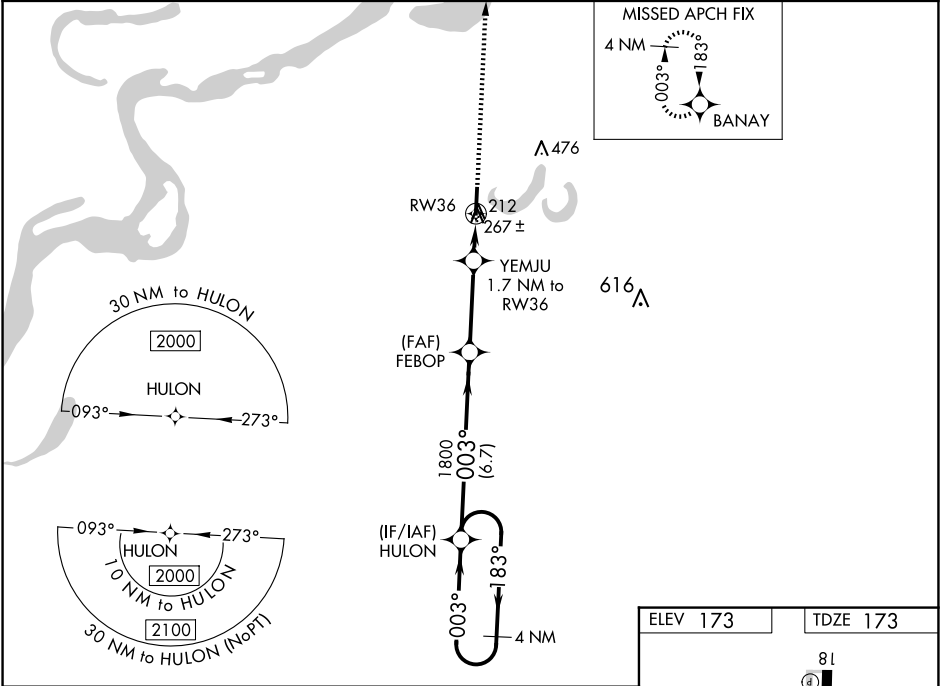

4 NM Holding Pattern		2000		BANAY	
2000		183°		003°	
GP 3.00° TCH 45		1800		740	
HULON		FEBOP		YEMJU	
1800		1.7 NM to RW36		RW36	
6.7 NM		3.3 NM		1.7	
CATEGORY	A	B	C	D	
LPV DA	477-1		304 (400-1)		
LNAV/VNAV DA	448-1		275 (300-1)		
LNAV MDA	520-1		347 (400-1)		
CIRCLING	740-1 567 (600-1)		780-1¾ 607 (700-1¾)		780-2 607 (700-2)

