


WAAS CH 78045 W17A	APP CRS 172°	Rwy Ldg 5110 TDZE 3188 Apt Elev 3188
--	------------------------	---

RNAV (GPS) RWY 17

SHALZ FLD (CBK)

RNP APCH - GPS.		MISSED APPROACH: Climb to 5200 direct IKBWU and hold.
Baro-VNAV and VDP NA when using Oakley altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Oakley altimeter setting: increase LPV DA to 3509 feet and all visibilities ¼ SM, LNAV/VNAV DA to 3509 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cat C ½ SM.		
AWOS-3P 118.175	DENVER CENTER 132.7 226.675	UNICOM 122.8 (CTAF) 0

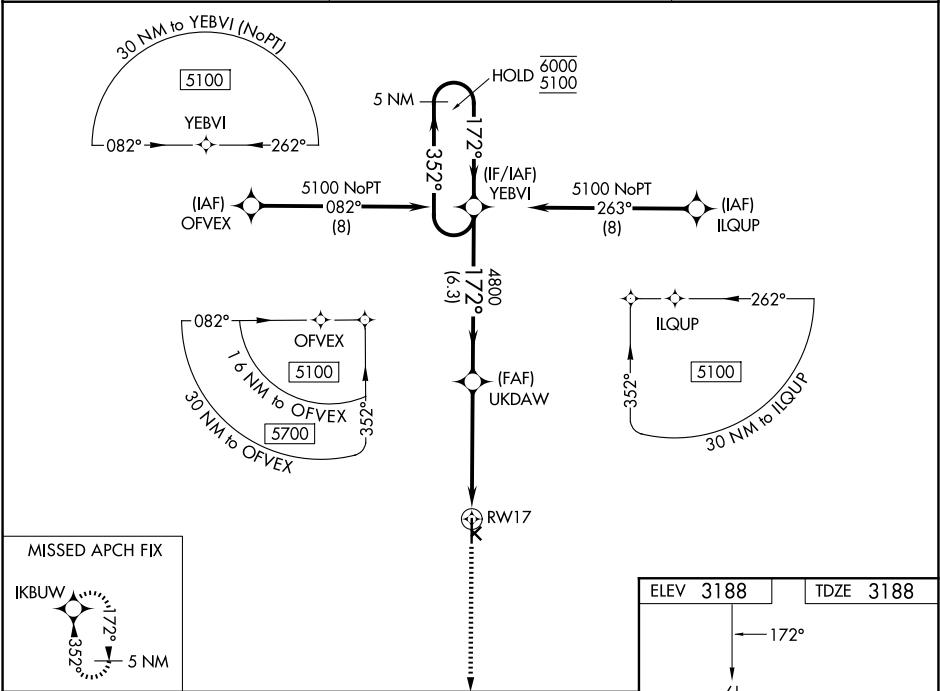

5200

IKBUW

↑

✱

YEBVI

5 NM Holding Pattern

UKDAW

4800

1.2 NM to RW17

1.2 NM

3.7 NM

6.3 NM

352°

6000

172°

5100

172°

4800

GP 3.00° TCH 40°

CATEGORY	A	B	C	D
LPV DA	3438-¾	250 (300-¾)		NA
LNAV/VNAV DA	3438-¾	250 (300-¾)		NA
LNAV MDA	3620-1	432 (500-1)	3620-1¼ 432 (500-1¼)	NA

