

WAAS CH 65901 W04A	APP CRS 037°	Rwy Ldg TDZE 863 Apt Elev 869
--	------------------------	---

RNAV (GPS) RWY 4

LEE C FINE MEML (AIZ)


RNP APCH.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Procedure NA at night. Rwy 4 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Camdenton altimeter setting and increase all DA 50 feet, all MDA 60 feet, and LNAV Cat C visibility ½ mile. Baro-VNAV NA when using Camdenton altimeter setting.

MISSED APPROACH: Climb to 3000 direct NOSCE and hold.

AWOS-3PT 135.325	MIZZU APP CON 124.1 353.925	UNICOM 122.8 (CTAF) 0
----------------------------	---------------------------------------	---------------------------------

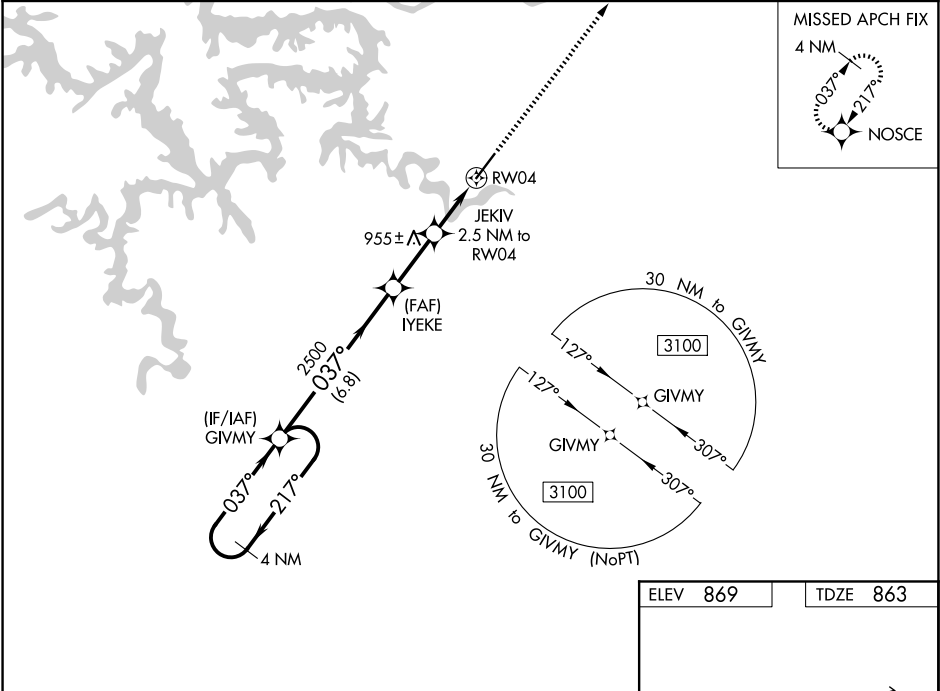

4 NM Holding Pattern		GIVMY		3000 NOSCE	
3100 ←217°		037°→		*LNAV only	
GP 3.00°		TCH 55		RWY04	
2500		*1700		JEKIV 2.5 NM to RWY04	
6.8 NM		2.5 NM		2.5 NM	
CATEGORY		A	B	C	D
LPV DA		1127-1	264 (300-1)		NA
LNAV/VNAV DA		1113-1	250 (300-1)		NA
LNAV MDA		1220-1	357 (400-1)		NA

