

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>56525</b><br><b>W14A</b> | APP CRS<br><b>136°</b> | Rwy Idg <b>5310</b><br>TDZE <b>4168</b><br>Apt Elev <b>4176</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 14

MONDELL FLD (ECS)

RNP APCH.



▼

▲

When Newcastle altimeter setting not received, procedure NA.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 53°C (128°F). Rwy 14 helicopter visibility reduction below ¾ SM NA. Circling NA northeast of Rwy 14-32.

MISSED APPROACH: Climb to 9400 direct WAMAK and hold, continue climb-in-hold to 9400.

|                          |                                      |                                 |
|--------------------------|--------------------------------------|---------------------------------|
| AWOS-3PT<br><b>118.0</b> | DENVER CENTER<br><b>127.95 338.2</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--------------------------------------|---------------------------------|

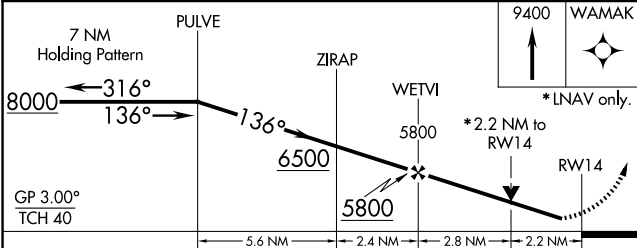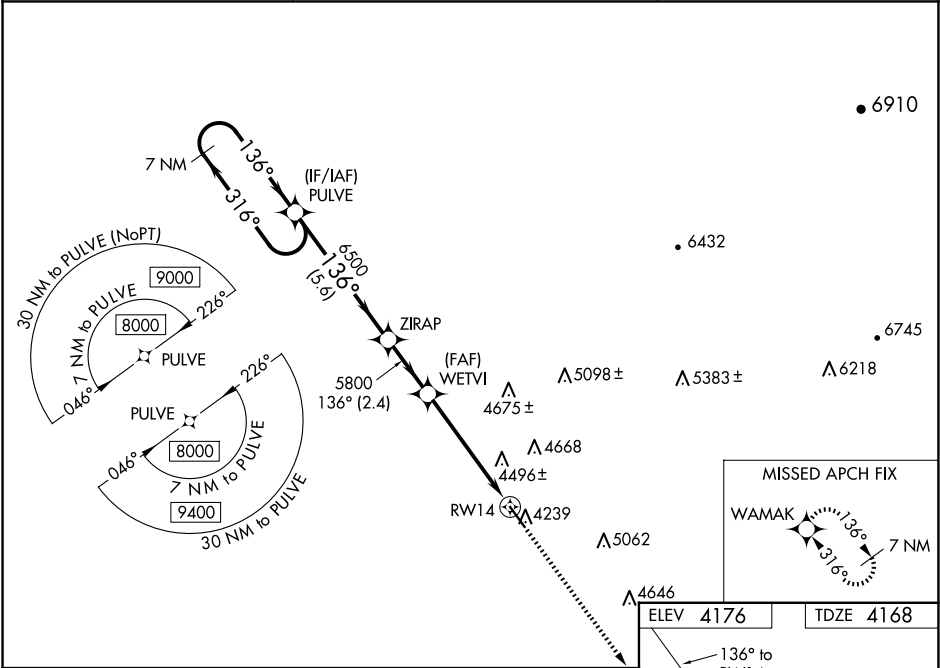

| CATEGORY     | A                     | B                       | C                       | D                       |
|--------------|-----------------------|-------------------------|-------------------------|-------------------------|
| LPV DA       | 4418-1 250 (300-1)    |                         |                         |                         |
| LNAV/VNAV DA | 4846-2½ 678 (700-2½)  |                         |                         |                         |
| LNAV MDA     | 4920-1<br>752 (800-1) | 4920-1¼<br>752 (800-1¼) | 4920-2<br>752 (800-2)   |                         |
| CIRCLING     | 4920-1<br>744 (800-1) | 4920-1¼<br>744 (800-1¼) | 4920-2¼<br>744 (800-2¼) | 5000-2¾<br>824 (900-2¾) |

