WAAS CH 61225 W32A	APP CRS 316°	Rwy ldg 5310 TDZE 4176 Apt Elev 4176

RNAV (GPS) RWY 32

MONDELL FLD (ECS)

RNP APCH.

When Newcastle altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 53°C (128°F). Circling NA northeast of Rwy 14-32. For inop ODAL, increase LNAV/VNAV visibility all Cats and LNAV Cats C/D ⅛ mile. Inop table does not apply to LPV all Cats and LNAV Cats A/B.

ODALS

MISSED APPROACH: Climb to 9500 direct PULVE and hold, continue climb-in-hold to 9500.

AWOS-3PT	DENVER CENTER	UNICOM
118.0	127.95 338.2	122.8 (CTAF) L

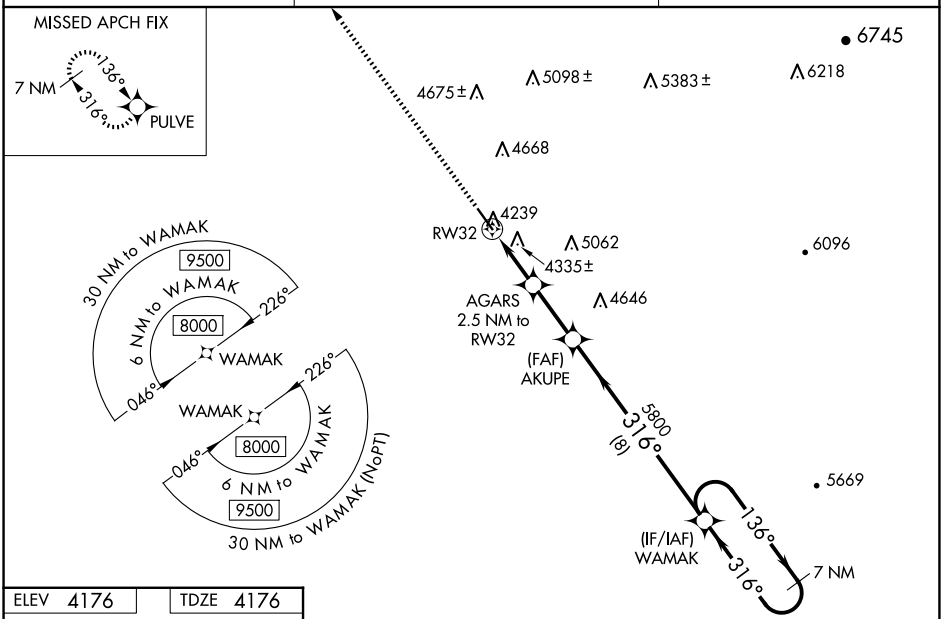

ELEV 4176	TDZE 4176

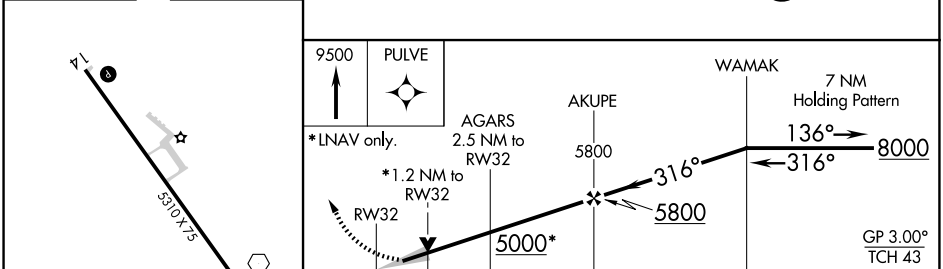

CATEGORY	A	B	C	D
LPV DA	4385-1 209 (300-1)			
LNAV/VNAV DA	4618-1⅜ 442 (500-1⅜)			
LNAV MDA	4600-1 424 (500-1)		4600-1⅛ 424 (500-1⅛)	
C CIRCLING	4700-1 524 (600-1)		4720-1½ 544 (600-1½)	5000-2¾ 824 (900-2¾)

REIL Rwy 14 L
MIRL Rwy 14-32 L

NW-1, 25 DEC 2025 to 22 JAN 2026
NW-1, 25 DEC 2025 to 22 JAN 2026