

WAAS CH 69203 W24A	APP CRS 238°	Rwy Ldg 6500 TDZE 66 Apt Elev 67
--	------------------------	---

RNAV (GPS) Z RWY 24


DEADHORSE (SCC) (PASC)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5000, and LNAV Cat E visibility to RVR 6000.
#RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 500 then climbing left turn to 1700 direct MAJEF and hold.

AFIS 118.4	ANCHORAGE CENTER 134.4 370.9	DEADHORSE RADIO 123.6 (CTAF) 0
----------------------	--	--

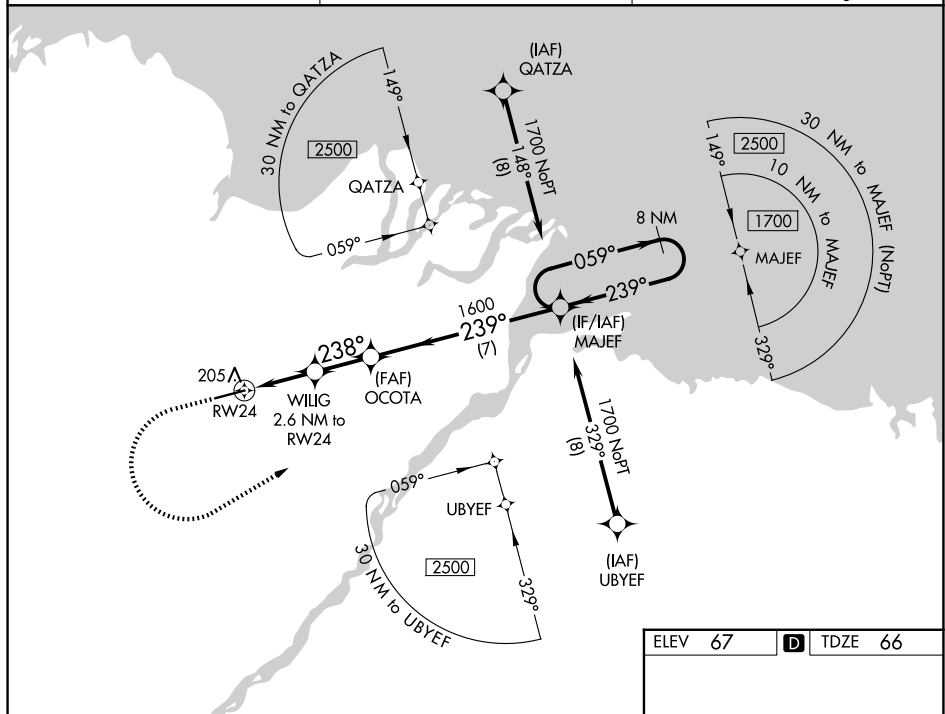

500 1700 MAJEF

8 NM Holding Pattern

* LNAV only.

WILIG 2.6 NM to RW24

OCOTA 1600

MAJEF

059° → 1700

← 239°

238°

239°

1600

940*

RW24

1.1 1.5 NM 2.1 NM 7 NM

GP 3.00° TCH 54

CATEGORY	A	B	C	D	E
LPV DA#	266/24 200 (200-½)				
LNAV/VNAV DA	381/30 315 (400-⅝)				
LNAV MDA	460/24 394 (400-½)		460/35 394 (400-⅝)		
CIRCLING	540-1 473 (500-1)		580-1½ 513 (600-1½)		620-2 553 (600-2)

