

WAAS CH 56611 W23A	APP CRS 233°	Rwy Ldg TDZE Apt Elev	4699 431 434
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

SARATOGA COUNTY (5B2)

RNP APCH.


▼

▲ NA

Baro-VNAV and VDP NA when using Albany altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA at night. When local altimeter setting not received, use Albany altimeter setting and increase all DAs 63 feet and MDAs 80 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C/D visibility ⅓ SM, and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct WALTU and hold.

AWOS-3 132.025	ALBANY APP CON 118.05 263.075	GCO 118.125	UNICOM 123.075 (CTAF) 0
--------------------------	---	-----------------------	-----------------------------------

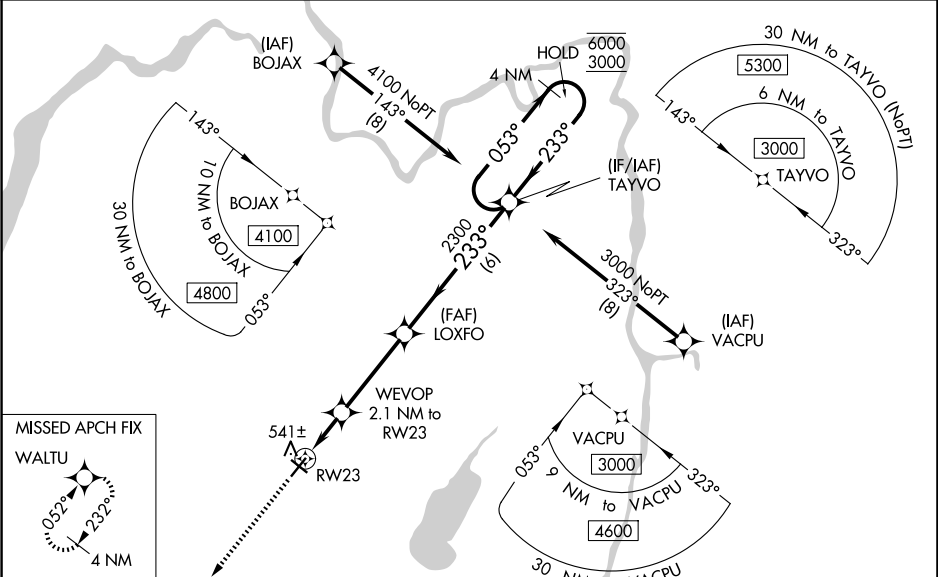

ELEV 434

TDZE 431

233°

4000 X 100

4699 X 100

32

5

☆

MIRL Rwy 5-23

MIRL Rwy 14-32

REIL Rws 5 and 23

3000 WALTU VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 43).				
*LNAV only				
RW23				
1 NM 1.1 3.6 NM 6 NM				
CATEGORY	A	B	C	D
LPV DA	698-78 267 (300-78)			
LNAV/VNAV DA	706-78 275 (300-78)			
LNAV MDA	800-1 369 (400-1)			
CIRCLING	980-1 546 (600-1)	1080-1 646 (700-1)	1140-2 706 (800-2)	1340-3 906 (1000-3)