



LOC I-DTO 109.1	APP CRS 177°	Rwy Ldg	18L	18R
		TDZE	642	643
		Apt Elev	643	643

ILS or LOC RWY 18L

DENTON ENTERPRISE (D'TO)

ADF required. RADAR required for procedure entry.		MALSR	MISSED APPROACH: Climb to 2500 then right turn direct PINCK LOM and hold.
	For inop ALS, increase S-ILS 18L all Cts visibility to ¾ SM. For inop ALS, increase S-LOC 18L Cat C/D to 1¾ SM.		

ATIS 119.325	LONE STAR APP CON 118.1 306.95	DENTON TOWER ★ 119.95 (CTAF)	GND CON 123.95
------------------------	--	--	--------------------------

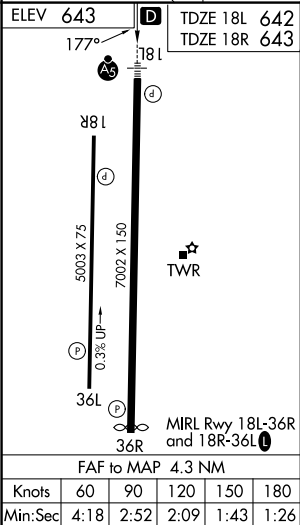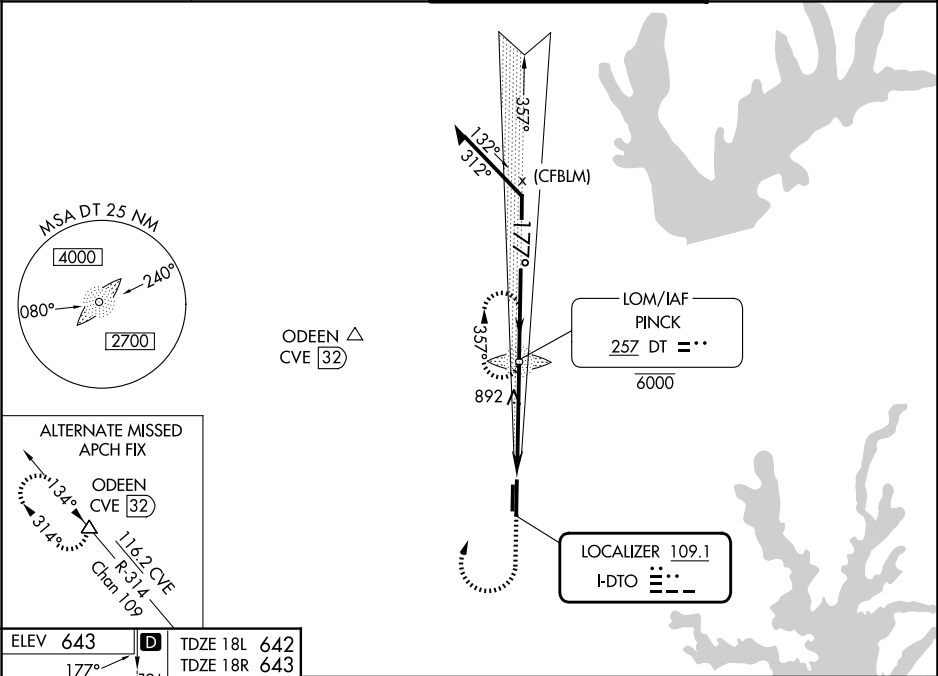

ELEV 643		TDZE 18L 642		TDZE 18R 643	
177°		18L		18R	
881		5003 X 75		7002 X 150	
361		0.3% UP		MIRL Rwy 18L-36R and 18R-36L	
FAF to MAP 4.3 NM		Knots		Min:Sec	
60		90		120	
4:18		2:52		2:09	
120		150		180	
1:43		1:26		1:26	