

WAAS CH 49009 W05A	APP CRS 052°	Rwy Idg TDZE 89 Apt Elev 93	7100
--	------------------------	---	-------------

RNAV (GPS) RWY 5

ALBERT J ELLIS (OAJ)


Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 43°C (109°F). DME/DME RNP -0.3 NA. VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase LPV DA to 383 feet; increase LNAV/VNAV DA to 559 feet and all visibilities $\frac{3}{8}$ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D $\frac{3}{8}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM. For inoperative MALSR, increase LNAV Cat C/D visibility to 1 mile. For inoperative MALSR, when using Wilmington altimeter setting, increase LPV all Cats visibility to $\frac{3}{8}$ mile, increase LNAV/VNAV all Cats to $\frac{1}{2}$ mile, and LNAV Cat C/D to $\frac{1}{8}$ mile.

MALSR



MISSED APPROACH:
Climb to 900 then climbing left turn to 2100 direct CUVAL and hold.

ATIS 124.475	WILMINGTON APP CON ★ 135.75 317.425	ELLIS TOWER ★ 132.65 (CTAF)	GND CON 125.4	CLNC DEL 121.4 257.6 (when twr closed)	UNICOM 122.95
------------------------	---	---------------------------------------	-------------------------	---	-------------------------

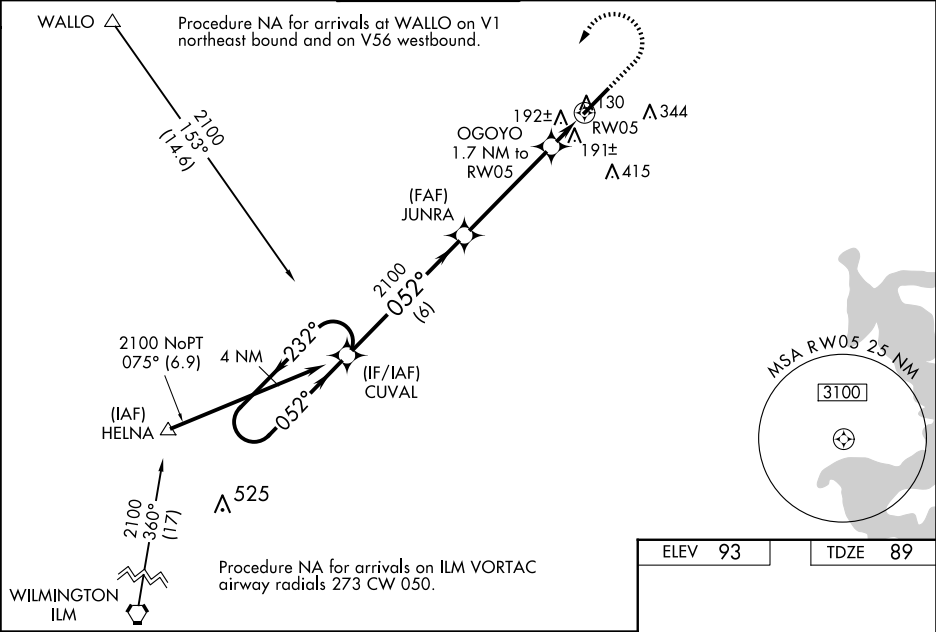

4 NM Holding Pattern		CUVAL	JUNRA	900	2100	CUVAL
2100 ← 232°		052° →	2100	OGOYO 1.7 NM to RW05	*LNAV only.	
GP 3.00° TCH 55		2100	*680	*1 NM to RW05	RW05	
		6 NM	4.4 NM	0.7 NM	1 NM	
CATEGORY	A	B	C	D		
LPV DA	289- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)			
LNAV/ VNAV DA	465- $\frac{3}{4}$		376 (400- $\frac{3}{4}$)			
LNAV MDA	460- $\frac{1}{2}$	371 (400- $\frac{1}{2}$)	460- $\frac{5}{8}$	371 (400- $\frac{5}{8}$)		
CIRCLING	540-1	560-1	720-1 $\frac{3}{4}$	720-2		
	447 (500-1)	467 (500-1)	627 (700-1 $\frac{3}{4}$)	627 (700-2)		

