

WAAS CH 86823 W36A	APP CRS 358°	Rwy Idg TDZE 140 Apt Elev 140
--	------------------------	---

RNAV (GPS) RWY 36

CLEVELAND MUNI (RNV)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greenville altimeter setting. When local altimeter setting not received, use Greenville altimeter setting and increase LPV DA to 438, LNAV/VNAV DA to 597, and all MDA 60 feet; increase LPV all Cats and LNAV Cats C/D visibility ¼ mile, and LNAV/VNAV all Cats visibility ⅓ mile. Rwy 36 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2100 direct JOMEM and hold.

AWOS-3PT 124.175	MEMPHIS CENTER 135.875 269.35	UNICOM 122.725 (CTAF) 0
----------------------------	---	-----------------------------------

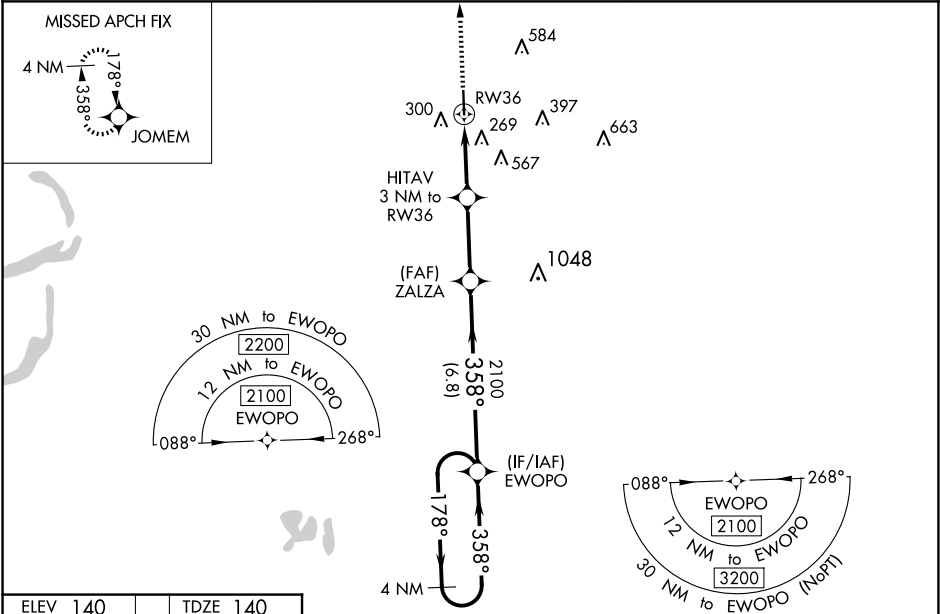

81

5005 X 75

36

358°

MIRL Rwy 18-36

REIL Rws 18 and 36

2100

↑

JOMEM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 46).

HITAV

3 NM to RW36

ZALZA

2100

EWOP0

4 NM Holding Pattern

*LNAV only.

*1.1 NM to RW36

RW36

1.1

1.9

3 NM

6.8 NM

358°

178°

358°

2100

GP 3.00°

TCH 54

1140*

2100

CATEGORY	A	B	C	D
LPV DA		390-3¼	250 (300-¾)	
LNAV/VNAV DA		549-1¾	409 (500-1¾)	
LNAV MDA		520-1	380 (400-1)	
CIRCLING	600-1	460 (500-1)	900-2¼ 760 (800-2¼)	900-2½ 760 (800-2½)