

WAAS CH 65641 W22A	APP CRS 217°	Rwy Ldg TDZE Apt Elev	5500 904 904
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

BOLTON FLD (TZR)

⚠


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using John Glenn Columbus Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received use John Glenn Columbus Intl setting and increase LPV DA to 1196 feet and LNAV/VNAV DA to 1382 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct
WATIG and hold.

AWOS-3PT 135.925	COLUMBUS APP CON 134.0 279.6	BOLTON TOWER ★ 128.1 (CTAF) 0	GND CON 121.8
----------------------------	--	---	-------------------------

RADAR REQUIRED

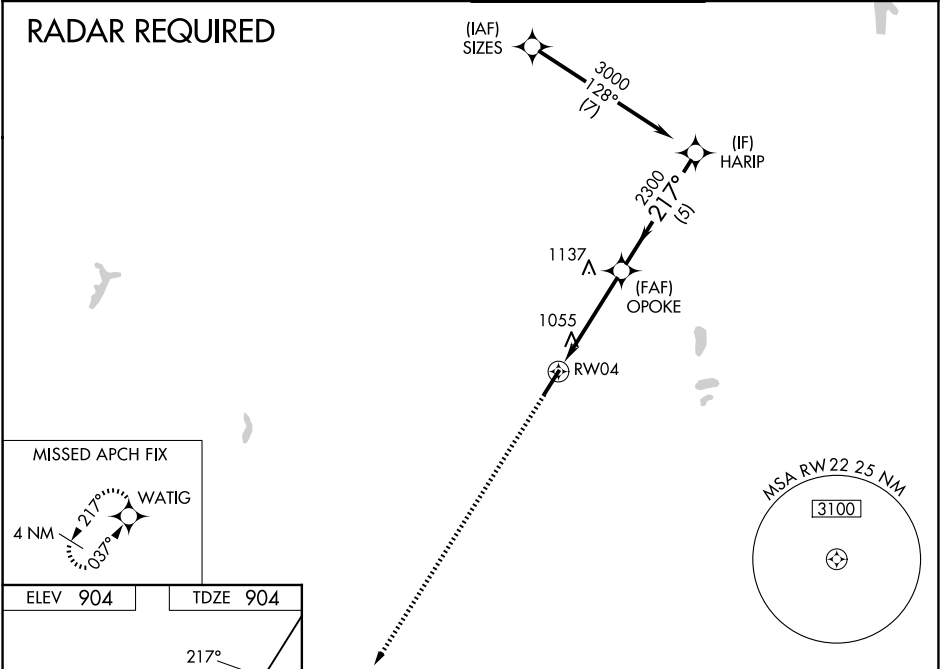

ELEV 904	TDZE 904
217°	
TWR ★	
5500 X 100	
REIL Rwy 22 0	
MIRL Rwy 4-22 0	
2700	WATIG
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).	
* LNAV only.	
OPOKE	
HARIP	
3000	
GP 3.00°	
TCH 40	
1.2 NM	
3.1 NM	
5 NM	
CATEGORY	A
CATEGORY	B
CATEGORY	C
CATEGORY	D
LPV	DA
1154-7/8	250 (300-7/8)
LNAV/VNAV	DA
1339-1½	435 (500-1½)
LNAV MDA	1320-1
416 (500-1)	1320-1½
416 (500-1½)	1500-2
596 (600-2)	
CIRCLING	1360-1
456 (500-1)	1380-1
476 (500-1)	1380-1½
476 (500-1½)	

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026