

WAAS CH 77929 W11A	APP CRS 111°	Rwy Idg TDZE 1988 Apt Elev 1989	5091
--	------------------------	---	-------------


RNAV (GPS) RWY 11

L M CLAYTON (OLF')

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wokla FLD/Glasgow-Valley County altimeter setting: increase LPV DA to 2329 ft and visibility ¾ SM, LNAV/VNAV DA to 2407 ft and visibility ½ SM; increase all MDA 160 feet and LNAV and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH:
Climb to 4800 direct
CARAV and hold.

ASOS 118.325	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
------------------------	---	--

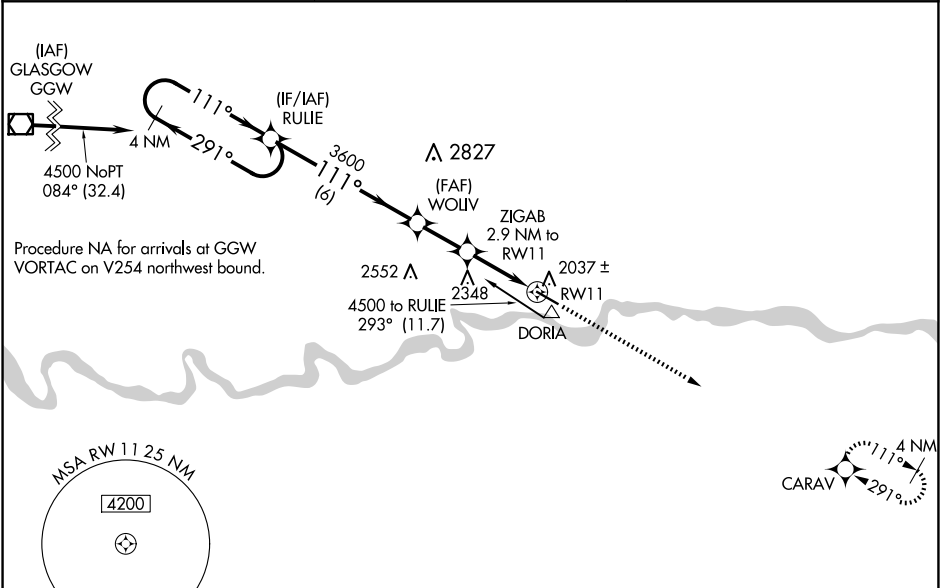

ELEV 1989

TDZE 1988

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).

4800 CARAV

111° to RWY 11

* LNAV only.

3091 x 100

4500 ← 291°
111° →

GP 3.00°
TCH 40

RULIE

WOLIV 3600

ZIGAB 2.9 NM to RWY 11

* 1.5 NM to RWY 11

* 2940

6 NM 2 NM 1.4 NM 1.5 NM

CATEGORY	A	B	C	D
LPV DA	2188-¾ 200 (200-¾)			
LNAV/VNAV DA	2266-7/8 278 (300-7/8)			
LNAV MDA	2500-1 512 (600-1)		2500-1¾ 512 (600-1¾)	
CIRCLING	2500-1 511 (600-1)		2660-2 671 (700-2) 2780-2½ 791 (800-2½)	

MIRL Rwy 11-29 **1**
REIL Rwy 11-29 **1**