


WAAS CH 56221 W33A	APP CRS 331°	Rwy Ldg TDZE 217 Apt Elev 236
--	------------------------	---


RNAV (GPS) RWY 33

RICHMOND EXEC/CHESTERFIELD COUNTY (F CI)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 3000 direct DOCEV and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using RIC altimeter setting. For inop ALS, increase LPV all visibilities to ¾ SM, increase LNAV/VNAV all visibilities to 1 ¾, and increase LNAV visibility Cats C/D to 1 ¾ SM. When local altimeter setting not received, use RIC altimeter setting and increase LPV DA to 547 feet; increase LNAV/VNAV DA to 757 feet, increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.				
AWOS-3PT 128.625	POTOMAC APP CON 126.75 307.2	CLNC DEL 124.6	UNICOM 123.05 (CTAF) 0	

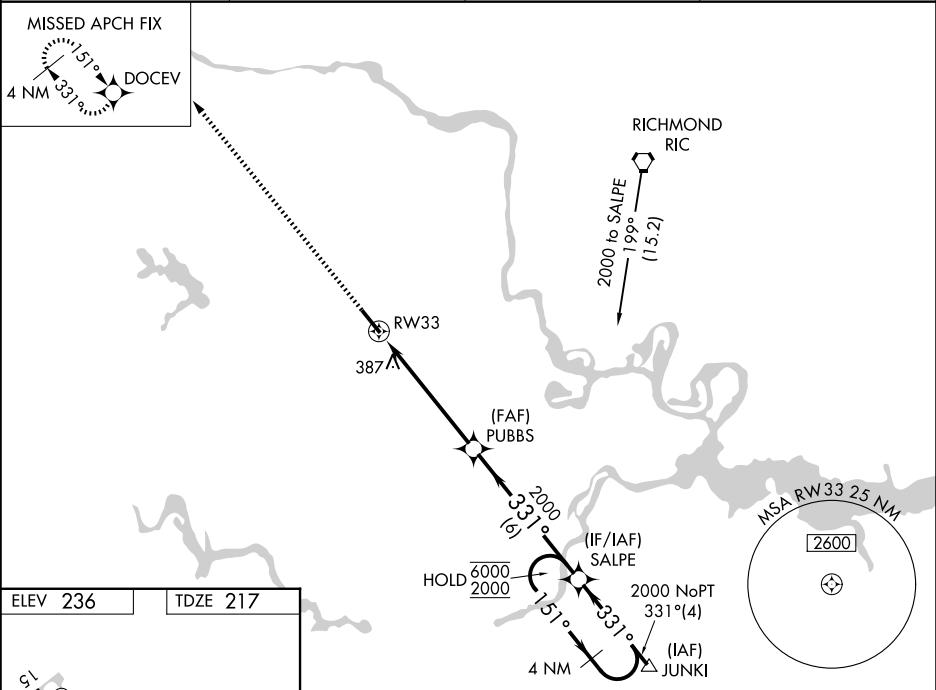

ELEV 236	TDZE 217
----------	----------

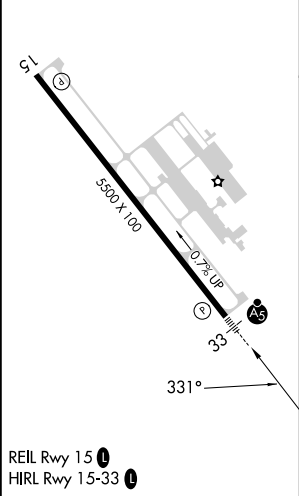

3000 ↑		DOCEV 		4 NM Holding Pattern	
CATEGORY	A		B	C	D
LPV DA	510-½		293 (300-½)		
LNAV/ VNAV DA	720-1		503 (500-1)		
LNAV MDA	720-½ 503 (500-½)		720-1 503 (500-1)		
CIRCLING	720-1 484 (500-1)	820-1 584 (600-1)	820-1½ 584 (600-1½)	1020-2 ½ 784 (800-2½)	