

WAAS CH 40315 W27A	APP CRS 274°	Rwy Idg 5502 TDZE 134 Apt Elev 141
--	------------------------	---

RNAV (GPS) RWY 27

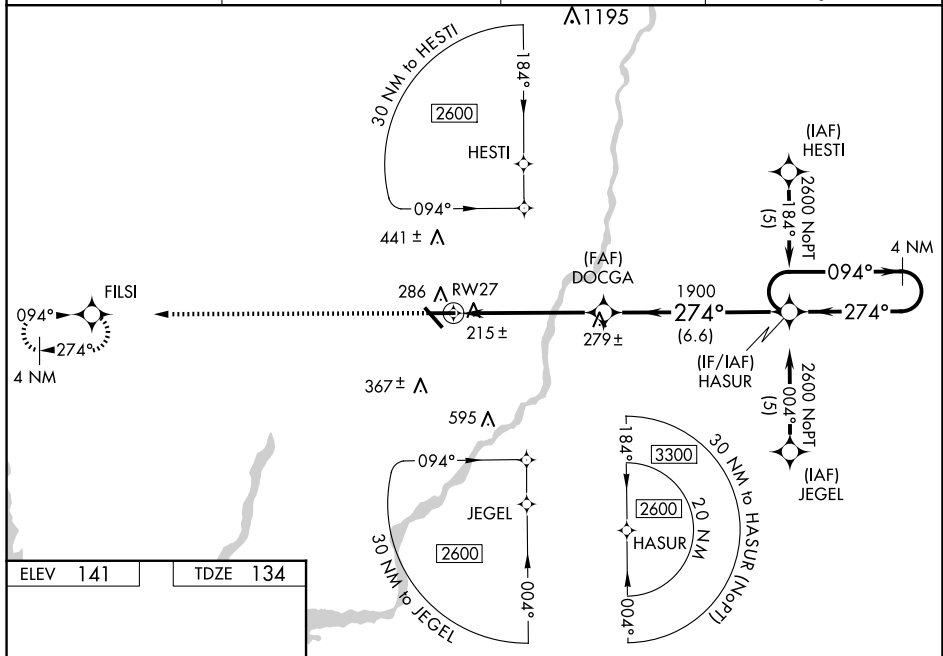
DECATUR COUNTY INDUSTRIAL AIR PARK (BGE)

T Baro-VNAV NA when using Tallahassee Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). **A** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Tallahassee Intl altimeter setting. When local altimeter setting not received, use Tallahassee Intl altimeter setting and increase LPV DA to 429 feet and LNAV/VNAV DA to 651 feet; increase all MDAs 100 feet and increase LNAV/VNAV all Cots visibility $\frac{1}{2}$ SM, LNAV Cat C visibility $\frac{1}{4}$ SM and Circling Cat C, D visibility $\frac{1}{2}$ SM. For inoperative MALSR increase LNAV Cat D visibility to $\frac{1}{4}$ mile. For inoperative MALSR, when using Tallahassee Intl altimeter setting increase LPV all Cots visibility to 1 mile.


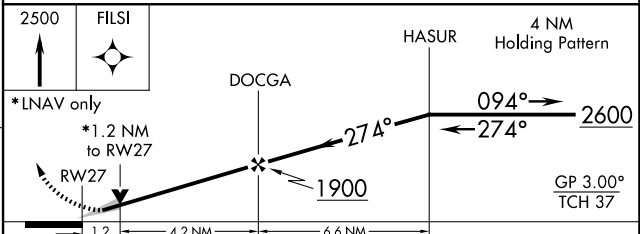


MISSED APPROACH:
Climb to 2500 direct
FISL and hold.

AWOS-3PT 121.125	TALLAHASSEE APP CON★ 128.7 254.3	CLNC DEL 124.775 335.65	UNICOM 122.975 0 (CTAF)
----------------------------	--	-----------------------------------	-----------------------------------



ELEV 141		TDZE 134
----------	--	----------

HIRL Rwy 9-27 **L**

CATEGORY	A	B	C	D
LPV DA		334-1/2	200 (200-1/2)	
RNAV/ RNAV DA		556-1	422 (500-1)	
RNAV MDA	540-1/2	406 (400-1/2)	540-3/4 406 (400-3/4)	540-1 406 (400-1)
CIRCLING	600-1	459 (500-1)	800-13/4 659 (700-13/4)	860-21/4 719 (800-21/4)

RNAV (GPS) RWY 27