

WAAS CH 86608 W35A	APP CRS 345°	Rwy Idg TDZE Apt Elev	5002 610 610
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 35
ROBERT SIBLEY (SZY)

RNP-APCH - GPS


Baro-VNAV NA when using Jackson Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Helicopter visibility reduction below 1 SM not authorized. When local altimeter setting not received, use Jackson Rgnl altimeter setting: increase LPV DA to 1042 and all visibilities ¼ SM, increase LNAV/VNAV DA to 1084 and all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cat C and D and Circling visibility Cat D ¼ SM. Straight-in Rwy 35 NA at night, Circling Rwy 17, 35 NA at night.

MISSED APPROACH:
Climb to 2600 direct
YIPUB and hold.

AWOS-3 118.425	MEMPHIS CENTER 124.35 318.1	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

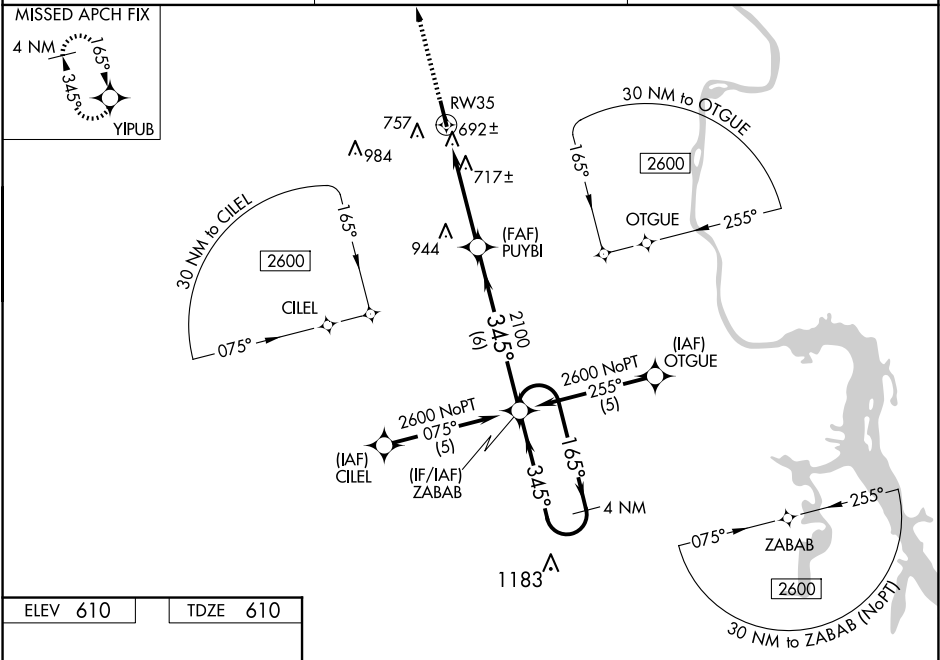

ELEV 610	TDZE 610
----------	----------

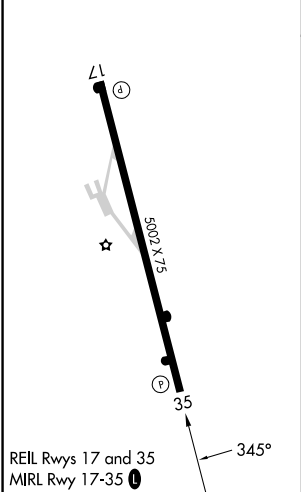

2600 ↑	YIPUB ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 4.00°/TCH 29).		ZABAB	4 NM Holding Pattern
				2600	
		4.5 NM	6 NM		GP 3.00° TCH 40
CATEGORY	A		B	C	D
LPV DA	944-1¼ 334 (400-1¼)				
LNAV/ VNAV DA	986-1¼ 376 (400-1¼)				
LNAV MDA	980-1 370 (400-1)				980-1¼ 370 (400-1¼)
CIRCLING	1060-1 450 (500-1)	1080-1 470 (500-1)	1080-1½ 470 (500-1½)	1300-2¼ 690 (700-2¼)	

SE-1, 25 DEC 2025 to 22 JAN 2026

SE-1, 25 DEC 2025 to 22 JAN 2026