APP CRS	Rwy ldg	3803
280°	TDZE	422
	Apt Elev	424

RNAV (GPS) RWY 28
WILLIAMSON/SODUS (SDC)

RNP APCH - GPS.

Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct GOYER and hold.

AWOS-3	ROCHESTER APP CON	UNICOM
124.2	119.55 269.6	122.8 (CTAF) L

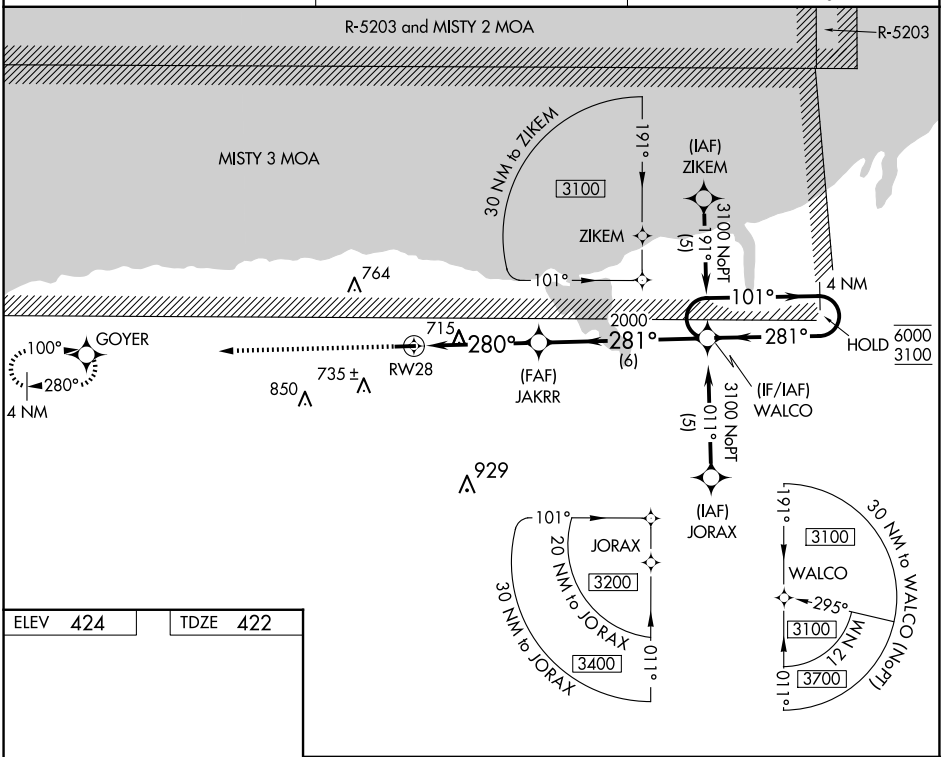

ELEV 424	TDZE 422

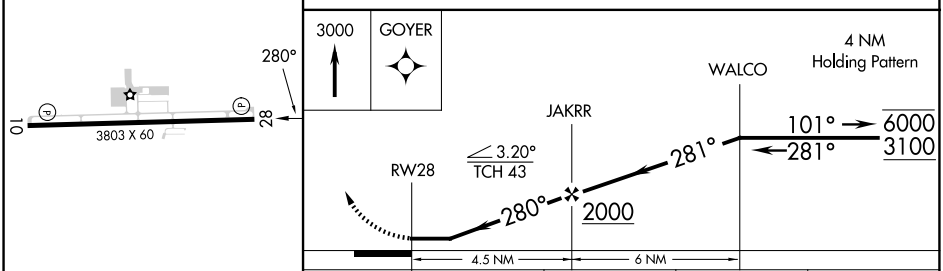

CATEGORY	A	B	C	D
LNAV MDA	980-1	558 (600-1)	980-1⅝ 558 (600-1⅝)	NA
C CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

NE-2, 25 DEC 2025 to 22 JAN 2026

NE-2, 25 DEC 2025 to 22 JAN 2026