

WAAS CH 40238 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	3641 708 708
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

ARENS FLD (RWN)

Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cts visibility 1/8 mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3 135.775	SOUTH BEND APP CON ★ 132.05 257.8	UNICOM 122.8 (CTAF) 0
------------------------------	---	---------------------------------

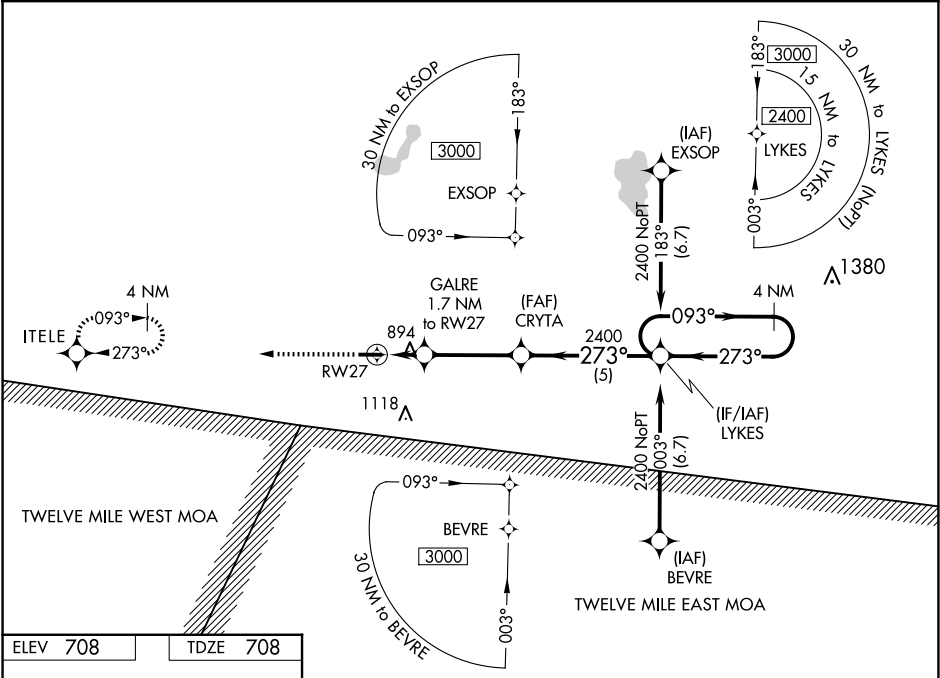

ELEV 708

TDZE 708

MIRL Rwy 9-27 0

REIL Rws 9 and 27 0

2400 ITELE VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).			
*LNAV only.			
CRYTA 2400 LYKES 4 NM Holding Pattern			
RW27 GALRE 1.7 NM to RW27 273° 093° 2400 273° 2400 GP 3.00° TCH 45			
*1280			
1.7 NM 3.5 NM 5 NM			
CATEGORY	A	B	C
LPV DA	995-1	287 (300-1)	NA
LNAV/VNAV DA	1224-1¾	516 (600-1¾)	NA
LNAV MDA	1200-1	492 (500-1)	1200-1¾ 492 (500-1¾) NA
CIRCLING	1240-1	532 (600-1)	1480-2¼ 772 (800-2¼) NA