

LOC/DME I-EKY
111.75
Chan **54** (Y)

APP CRS
053°

Rwy Ldg
TDZE **700**
Apt Elev **700**

ILS or LOC RWY 5
BESSEMER NTL (EKY)

NA

When local altimeter setting not received, use Alabaster altimeter setting and increase DA 41 feet, increase all MDAs 60 feet; increase S-LOC 5 Cat C visibility $\frac{1}{8}$ SM and Cat D visibility $\frac{1}{4}$ SM, increase Circling Cat C visibility $\frac{1}{8}$ SM Cat D visibility $\frac{1}{4}$ SM, increase JURAM fix S-LOC 5 Cat C visibility $\frac{1}{8}$ SM and Cat D visibility $\frac{1}{4}$ SM; increase Circling Cat D visibility $\frac{1}{4}$ SM. VDP NA with Alabaster altimeter setting.


MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct OKW VORTAC and hold.

AWOS-3PT
118.825

BIRMINGHAM APP CON
124.9 351.85

CLNC DEL
123.75

UNICOM
123.0 (CTAF) **0**

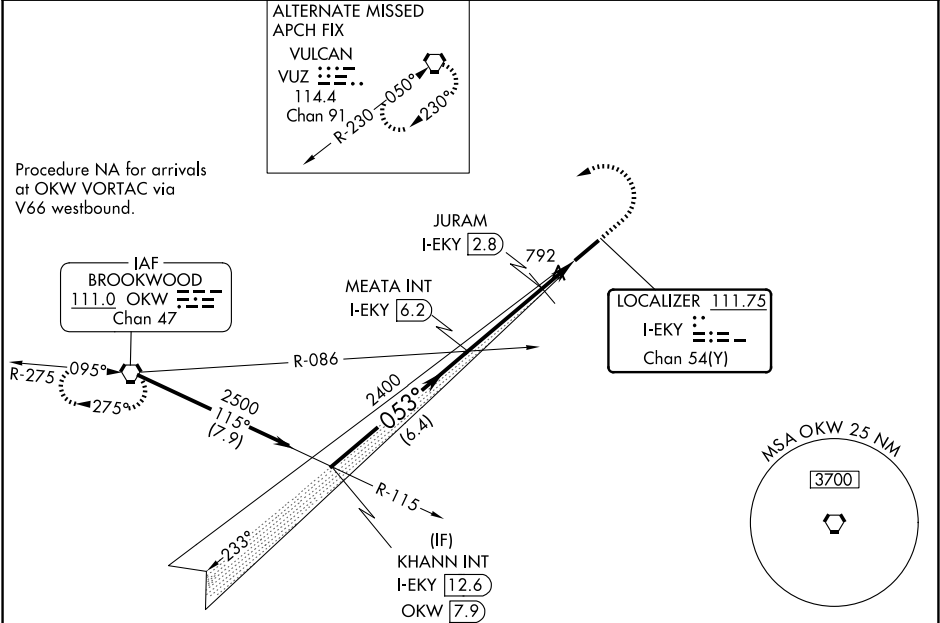

Procedure Turn NA

KHANN INT I-EKY **12.6**

1260 when using Alabaster altimeter setting.

MEATA INT I-EKY **6.2**

JURAM I-EKY **2.8**

* I-EKY **2.2**

* I-EKY **1.2**

OKW

ELEV 700

TDZE 700

GS 3.00° TCH 60

2500 $\swarrow$ 053°

2400

2400

* LOC only

6.4 NM

3.4 NM

0.6 NM

1.1 NM

CATEGORY	A	B	C	D
S-ILS 5	900- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
S-LOC 5	1200-1	500 (500-1)	1200- $1\frac{3}{8}$ 500 (500- $1\frac{1}{8}$)	1200- $1\frac{1}{2}$ 500 (500- $1\frac{1}{2}$)
CIRCLING	1200-1	500 (500-1)	1220- $1\frac{1}{2}$ 520 (600- $1\frac{1}{2}$)	1320-2 620 (700-2)
JURAM FIX MINIMUMS				
S-LOC 5	1100-1	400 (400-1)	1100- $1\frac{1}{8}$ 400 (400- $1\frac{1}{8}$)	1100- $1\frac{1}{4}$ 400 (400- $1\frac{1}{4}$)
CIRCLING	1200-1	500 (500-1)	1220- $1\frac{1}{2}$ 520 (600- $1\frac{1}{2}$)	1320-2 620 (700-2)

HIRL Rwy 5-23 **0**
REIL Rwy 5 and 23 **0**
FAF to MAP 5.1 NM
Knots 60 90 120 150 180
Min:Sec 5:06 3:24 2:33 2:02 1:42