

WAAS CH 56433 W27A	APP CRS 273°	Rwy Ldg 4500 TDZE 858 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 27


KEWANEE MUNI (EZI)

RNP APCH - GPS.

Baro-VNAV NA. Use GBG altimeter setting; when not received use MLI altimeter setting and increase LPV DA to 1213 feet, LNAV/VNAV DA to 1242 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 2500 direct WIKOK and hold.

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

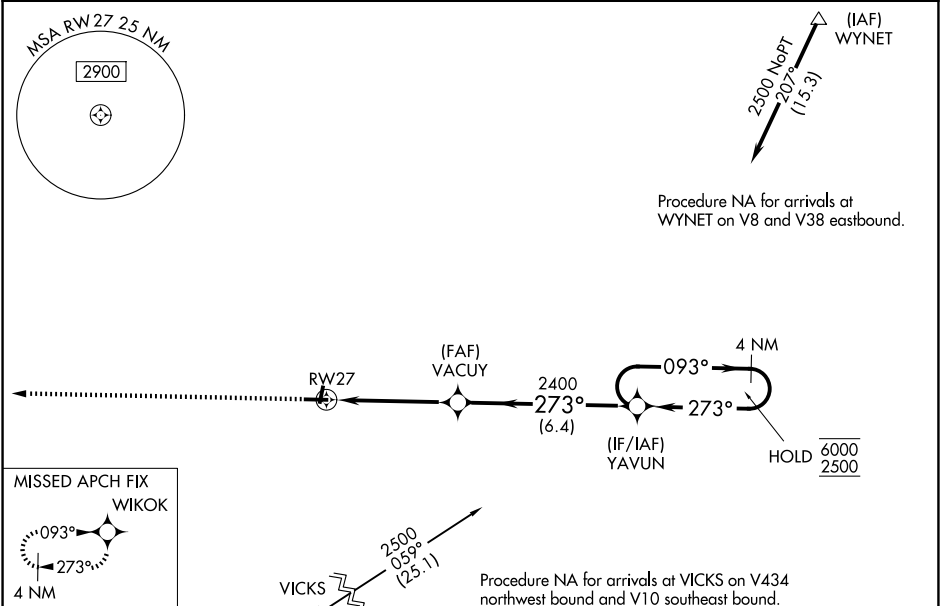

ELEV 858

TDZE 858

2500

WIKOK

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).

4 NM Holding Pattern

VACUY

2400

273°

093°

6000

2500

GP 3.00°

TCH 40

RW27

4.7 NM

6.4 NM

3200 X 60

4500 X 75

27

273°

CATEGORY	A	B	C	D
LPV DA	1183-1	325 (400-1)		NA
LNAV/VNAV DA	1212-1	354 (400-1)		NA
LNAV MDA	1380-1	522 (600-1)	1380-1½ 522 (600-1½)	NA
CIRCLING	1380-1 522 (600-1)	1520-1 662 (700-1)	1520-1¾ 662 (700-1¾)	NA

MIRL Rwy 1-19 and 9-27 0