


WAAS CH 61313 W29A	APP CRS 292°	Rwy Idg 5350 TDZE 137 Apt Elev 142	RNAV (GPS) RWY 29 ST MARY'S COUNTY RGNL (2W6)
--	------------------------	---	---

RNP APCH - GPS.	▼ ▲ NA Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Patuxent River altimeter setting: increase LPV DA to 475 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 688 feet and all visibilities ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cats C/D ½ SM.	MISSED APPROACH: Climb to 700 then climbing left turn to 5000 direct COLIN and hold, continue climb in hold to 5000.
-----------------	---	---

AWOS-3 119.575	PATUXENT APP CON ★ 121.0 250.3	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

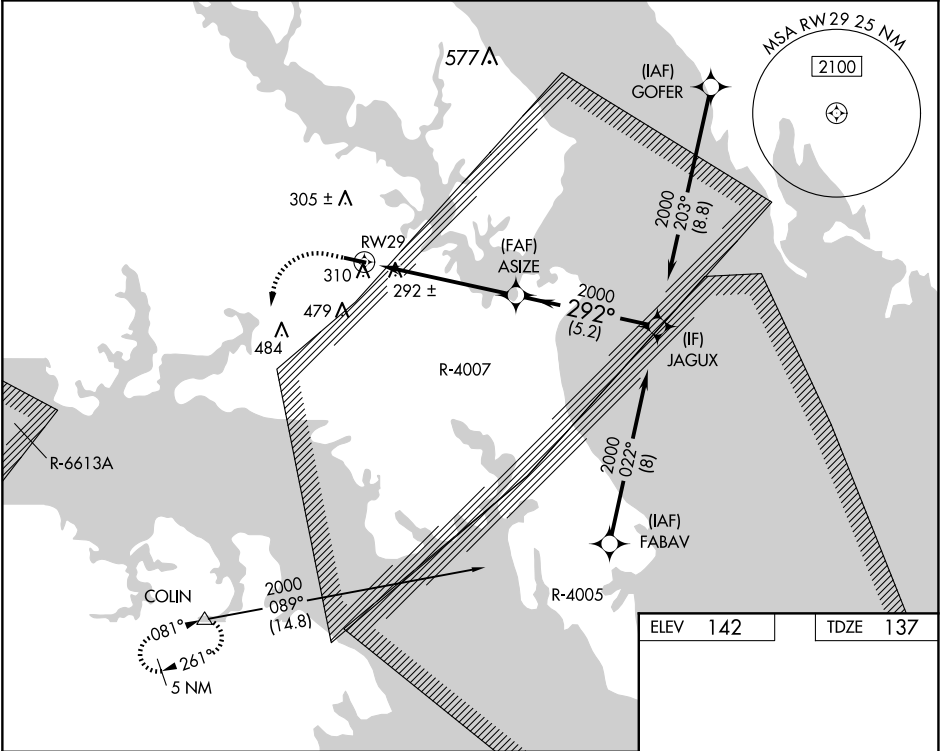

700	5000	COLIN	ASIZE	JAGUX	
↑	↶	△	2000	2000	
RW29		1.5 NM to RW29	292°	2000	GP 3.10° TCH 40
1.5 NM		4.1 NM	5.2 NM		
CATEGORY	A	B	C	D	
LPV DA	441-7/8 304 (300-7/8)				
LNAV/VNAV DA	654-13/8 517 (600-13/8)				
LNAV MDA	620-1	483 (500-1)	620-13/8	483 (500-13/8)	
CIRCLING	660-1	518 (600-1)	840-2 698 (700-2)	840-21/4 698 (700-21/4)	

REIL Rwy 11 and 29 0

MIRL Rwy 11-29 0