

(MAREO5.MAREO) 23334  
MAREO FIVE DEPARTURE


AL-6452 (FAA)

INDIANAPOLIS RGNL (MQJ)  
INDIANAPOLIS, INDIANA


AWOS-3PT  
124.175  
CLNC DEL  
119.25  
INDIANAPOLIS DEP CON  
127.15 317.8

TAKEOFF MINIMUMS  
Rwys 7, 16, 25: Standard.  
Rwy 34: 300-1 or standard with minimum  
climb of 347' per NM to 1100.

TOP ALTITUDE:  
ASSIGNED BY ATC

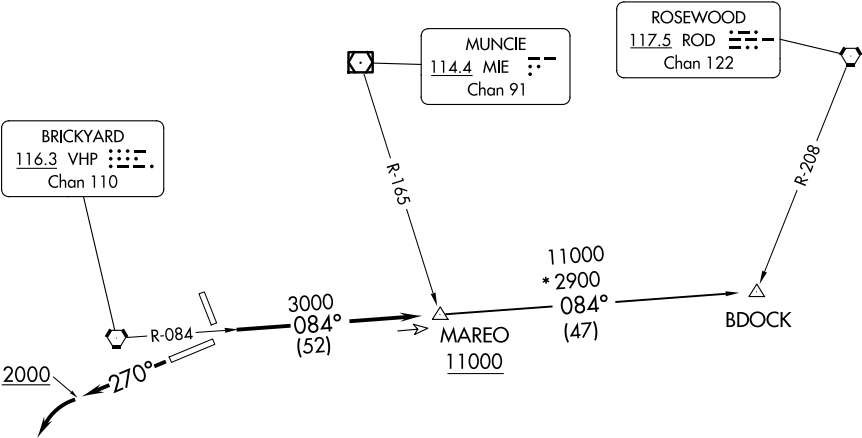

- NOTE: RADAR required.  
NOTE: Select appropriate localizer/DME frequency/channel  
prior to departure.  
NOTE: Turbojets accelerate to 250K until reaching 10000,  
if unable advise ATC.  
NOTE: Assigned to aircraft with a requested altitude of 11000 or above.



NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**  
TAKEOFF RWY 25: Climb heading 270° to 2000 before turning left. Then on assigned  
heading to assigned altitude. Thence....

DEPARTING ALL OTHER AUTHORIZED RUNWAYS: Climb on assigned heading to  
assigned altitude. Thence....

....expect RADAR vectors to join VHP R-084 to MAREO INT then via transition or  
assigned route. Expect clearance to requested altitude ten minutes after departure.

BDOCK TRANSITION (MAREO5.BDOCK): From over MAREO INT via VHP R-084  
to BDOCK INT.

MAREO FIVE DEPARTURE  
(MAREO5.MAREO) 01FEB18

INDIANAPOLIS, INDIANA  
INDIANAPOLIS RGNL (MQJ)