

WAAS CH 69646 W07A	APP CRS 072°	Rwy Ldg TDZE Apt Elev	6005 862 862
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7




INDIANAPOLIS RGNL (MQJ)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Rwy 7 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using IND altimeter setting. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1271 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1194 feet and all visibilities ½ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2700 direct FOGBU and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF) 0
----------------------------	---	-----------------------------------

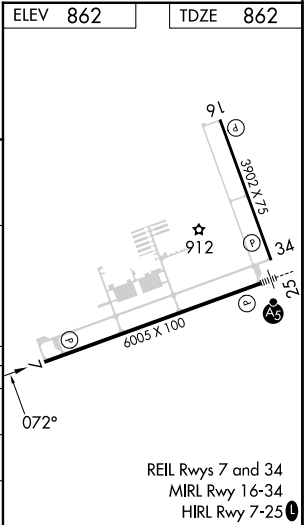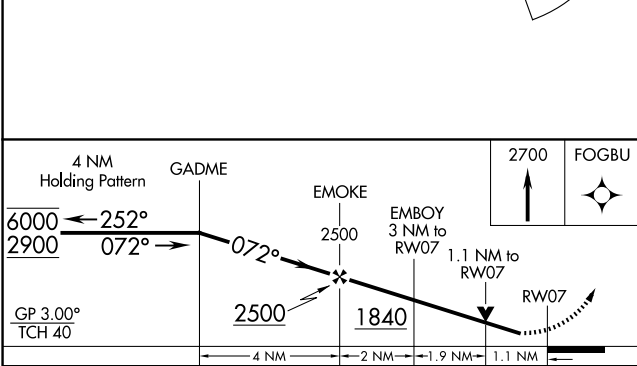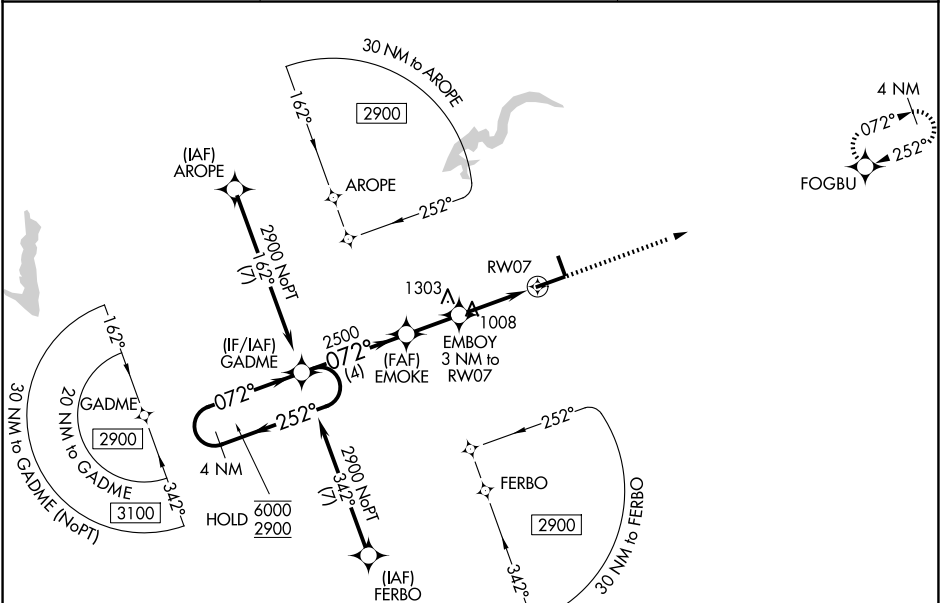

CATEGORY	A	B	C	D
LPV DA	1216-1	354 (400-1)		
LNAV/VNAV DA	1139-7/8	277 (300-7/8)		
LNAV MDA	1260-1	398 (400-1)	1260-1 1/8	398 (400-1 1/8)